

PRODUCT CATALOGUE.



EXPERIENCED SERVICE & SUPPORT NETWORK



POWERS PERFORMANCE.

From humble beginnings in New Zealand, to a world leader in Commercial Mowing - our success is driven by a passion to help customers find a better way.

We listen to how you use our products, designing with customer focused innovation to solve problems you encounter. The result? Mowing solutions which increase productivity, reduce maintenance and can be relied on day-afterday, for years of full time commercial use.



LONG
COMMERCIAL LIFE.



LOW TOTAL-COST-OF-OWNERSHIP.



EASE OF MAINTENANCE.



INTUITIVE TO USE.



INDUSTRY LEADING
CUT PRESENTATION.



SERVICE THAT EXCEEDS EXPECTATIONS.









STRIKER



PROCUT/S5



PROCUT/S5 SR



PROCUT/S5 FM



TOPPER/S3



STEALTH/S3



SNAKE/S2



STEALTH/S3 SR



PEGASUS/S5



X-WAM



FLAILDEK/FX



EZEEMOW/FX



FORCE



WARLORD/S3



TRIMAX STRIKER

Trimax STRIKER is a multi-spindled rotary mower with extremely low maintenance requirements and is ideal for use on compact tractors.

The Trimax Striker is designed to give a high cut quality and an excellent spread of clippings. Highly versatile, the Striker is capable of mowing grass 10 to 100mm. With an enclosed cutting chamber and a downward rear dispersion of clippings, the Striker has surpassed international safety standards making it one of the safest mowers on the market for use in public spaces.

Fitted with Trimax's exclusive LazerBladez™, the Striker can produce a cut and finish to rival that of a cylinder mower and is ideal for educational and sports facilities where presentation is key!







SPECIFICATIONS	150	190
Cutting Width	1.46m (4' 9½")	1.94m (6' 4½")
Overall Width	1.56m (5' 1½")	2.04m (6' 8½")
Overall Length	1.16m (3' 9½")	1.16m (3' 9½")
Height	0.83m (2' 8½")	0.83m (2' 8½")
Cut Height Range	10 - 100mm (¾" - 4")	10 - 100mm (¾" - 4")
No. of Blade Spindles	3	4
Approx. Weight	322kg (710lbs)	400kg (882lbs)
Min PTO Output	25hp	30hp
**************************************	1 l . B i	

^{*}Minimum PTO output is a guide only. Requirement varies with the type of work and the terrain



The Striker has been built to withstand all conditions, a good solid mower. We had a test mow on delivery, the grass was about 150mm high and wet, it went great, made a good even cut leaving an even spread of cut grass, we thought it was the best mower we had ever seen. IAN DUFTY | Morrinsville, NZ

KEY APPLICATIONS.

- ✓ Sports fields & pitches
 ✓ Golf Courses
 ✓ Country Clubs
- ✓ Estates & Lifestyle Blocks ✓ Schools

WHAT'S NEW ON STRIKER

The Striker was originally designed as a compact solution for sports turf, especially for grounds maintenance for local football and cricket clubs. It features a simpler pan construction than the ProCut and includes maintenance-free ball bearing spindles.



PRODUCT FEATURES.



LOW COST OF OWNERSHIP With only 4 grease points on the mower and with robust sealed spindles, the Trimax Striker has incredibly low maintenance requirements.



SAFETY FOR PUBLIC PLACES Striker exceeds international safety standards, and can be used with confidence in public spaces, school sports fields and confined



LAZERBLADEZ™ Available in uplift and flat formation to suit mowing requirements, the unique tilt forward design minimises hang back in tough conditions.



ADVANCED ENGINEERING Trimax's meticulous design process combined with bespoke, innovative low as 25hp, the Striker is perfect manufacturing technologies produce the most accurate rotary



STRIPING CAPABLE Fitted with full width front and rear rollers, the Striker can produce striped patterned turf for those spaces where presentation is key.



COMPACT TRACTOR SUITABLE Able to be paired with tractors as for smaller budgets and compact tractors.

*OPTIONAL FEATURES.

▼ ROLLER SCRAPERS

Cleans rollers and reduces clumping in wet conditions.

✓ NEXABLADES

Scientifically designed for high-end turf giving a superior cut and spread when it matters most.



TRIMAX PROCUT/S5

A highly versatile roller mower, the PROCUT SERIES 5 is a multi-spindled roller mower designed to give a high cut quality and a great spread of clippings.

The ProCut has been a successful part of the Trimax range for over 30 years. Mowing parks, reserves, school grounds, sports fields and golf courses around the world - From the grounds of Windsor Castle to your local community sports fields.

The ProCut Series 5, released in 2023 is excellence refined. The Procut S5 builds on the market leading cut and spread quality of the previous series whilst removing all daily maintenance requirements making it the perfect solution for a variety of commercial environments.

TALK TO US TODAY ABOUT THE CAPABILITIES OF PROCUT SERIES 5 IN YOUR ENVIRONMENT.







SPECIFICATIONS	178	210	237	290
Cutting Width	1.74m (5' 8 ½")	2.06m (6' 9")	2.32m (7' 7")	2.89m (9' 6")
Overall Width	1.89m (6' 2 ½")	2.21m (7' 3")	2.47m (8'1")	3.04m (10')
Overall Length	1.44m (4' 9")	1.51m (4' 11 ½")	1.44m (4' 9")	1.44m (4' 9")
Height	1.08m (3' 6 ½")	1.08m (3' 6 ½")	1.08m (3' 6 ½")	1.08m (3' 6 ½")
Cut Height Range	10 - 110mm (¾" - 4 ¼")	10 - 110mm (³ / ₈ " - 4 ¹ / ₃ ")	10 - 110mm (³ / ₈ " - 4 ¹ / ₃ ")	10 - 110mm (¾" - 4 ¼")
No. of Blade Spindles	3	3	4	5
Approx. Weight	492kg (1085lbs)	543kg (1197lbs)	605kg (1334lbs)	707kg (1559lbs)
Min PTO Output	35hp	40hp	45hp	55hp

^{*}Minimum PTO output is a guide only. Requirement varies with the type of work and the terrain



The ProCut is a great mower. I mow 19 schools at 40mm and the schools always comment on how nice the grounds look. I mow fast and the spread is great. I'd recommend Trimax to anyone!

ALLEN COE | Schools Contractor, NZ

KEY APPLICATIONS.

- ✓ Municipalities
 ✓ Sport Fields
 ✓ Turf
 ✓ Education
 ✓ Golf
- ✓ Estates & Lifestyle Blocks

WHAT'S NEW ON PROCUT/S5

Maintaining your mower has never been easier with all daily greasing requirements being removed with the implementation of the new Titan Roller Bearings. The new auto-belt tensioning system reduces belt maintenance and improves drive to the spindles for a cleaner, stronger cut.



PRODUCT FEATURES.



TITAN ROLLER BEARING SYSTEM The Trimax Titan roller bearing system is maintenance-free. requiring no regular greasing, and provides excellent retention.



AUTOMATIC BELT TENSIONING Removes the need for belt adjustments and improves drive to the spindles and blades.



Available in uplift and flat formation to suit mowing requirements, the hang back in tough conditions.



LOW MAINTENANCE

Zero daily maintenance. Spindles, roller bearings and auto-belt unique tilt forward design minimises tensioning are maintenance-free.



STEADFAST SEALED SPINDLES

We've eliminated the tedious task of regular greasing. Covered by our 3-year warranty, maintenance costs are reduced, and productivity is enhanced.



FULL WIDTH ROLLERS

Full width rollers minimise scalping in undulating conditions and allow mowing over kerbsides and bunkers. Also aids in striping.



BELT CAVITY DUAL WASH FLAPS

Provides easy access for removal of grass and drainage of water from helt chamber.



ACCURATE SPINDLE SETTING TECHNOLOGY

Spindle height is perfectly aligned providing the most accurate cut possible.



PRECISE HEIGHT ADJUSTMENT

alterations.



STAND ON COVERS

Enables safe and easy access to the rear of the tractor when latches allow easy removal for



Clearly displayed indicators in both metric and imperial units and a high-tensile 2mm pitch adjuster for precise cut height



coupling the mower. Quick release cleaning and servicing.



✓ ANTI-BOUNCE / WEAR SKIDS

Eliminates scalping and bouncing and reduces side channel wear.

✓ ROLLER SCRAPERS

Cleans rollers and reduces clumping in wet conditions.

✓ LIGHTING KIT WITH STORAGE BRACKET

LED road lights, safety triangle, and bracket for storage box.

✓ STORAGE BOX

Easy access to spare parts and tools. **✓ FRONT MOUNT**

Convenient visibility. Only for tractors with front PTO drive.

✓ SINGLE ROLLER

Allows greater grass intake at the front of the mower.

✓ GALVANIZED SURFACE COATING Protect against corrosion in harsh environments.

✓ QUATTRO BLADES

Four blades (flat, upturned or mixed) per spindle for a finer cut.

✓ NEXABLADES

Scientifically designed for high-end turf giving a superior cut and spread when it matters most.

✓ ON CALL KIT

Each kit contains bearings blades and belts for a quick replacement in the field.





TRIMAX PROCUT/S5 SR

The original ProCut found phenomenal success in long grass applications due to its rigid construction, cut quality and manoeuvrability. With the ProCut S5 we have taken this to another level.

The Single Roller ProCut S5 is a long grass mower that provides a market leading cut and finish. Engineered with a low body profile and increased under deck clearance it provides excellent clipping distribution without any daily maintenance requirements.

Built with industry leading strength and durability, this is the machine you need for any commerical long grass applications.

TALK TO US TODAY ABOUT THE CAPABILITIES OF PROCUT SERIES 5 IN YOUR ENVIRONMENT.







SPECIFICATIONS	178	210	237	290
Cutting Width	1.74m (5' 8 ½")	2.06m (6' 9")	2.32m (7' 7")	2.89m (9' 6")
Overall Width	1.91m (6' 3")	2.22m (7' 3 ½")	2.48m (8' 1 ½")	3.05m (10' ½")
Overall Length	1.36m (4' 5")	1.43m (4' 8")	1.36m (4' 5")	1.36m (4' 5")
Height	1.08m (3' 6 ½")	1.08m (3' 6 ½")	1.08m (3' 6 ½")	1.08m (3' 6 ½")
Cut Height Range	10 - 110mm (¾" - 4 ¼")	10 - 110mm (³ / ₈ " - 4 ¹ / ₃ ")	10 - 110mm (¾" - 4 ¼")	10 - 110mm (¾" - 4 ⅓")
No. of Blade Spindles	3	3	4	5
Approx. Weight	462kg (1019lbs)	509kg (1122lbs)	568kg (1252lbs)	663kg (1462lbs)
Min PTO Output	35hp	40hp	45hp	55hp

^{*}Minimum PTO output is a guide only. Requirement varies with the type of work and the terrain



The ProCut is over and above what we ever expected. We knew we needed more than just a slasher, the fine cut and even dispersion of the ProCut leaves

DALE COOK | Copelands Estate, Warragul, VIC, AUSTRALIA

KEY APPLICATIONS.

✓ Horticulture
✓ Municipalities
✓ Aviation
✓ Racecourses
✓ Education

✓ Estates & Lifestyle Blocks

WHAT'S NEW ON PROCUT/S5 SR

Maintaining your mower has never been easier with all daily greasing requirements being removed with the implementation of the new Titan Roller Bearings. The new auto-belt tensioning system reduces belt maintenance and improves drive to the spindles for a cleaner, more consistent cut in heavy conditions.

PRODUCT FEATURES.



TITAN ROLLER BEARING SYSTEM The Trimax Titan roller bearing system is maintenance-free. requiring no regular greasing, and provides excellent retention.



AUTOMATIC BELT TENSIONING Removes the need for belt adjustments and improves drive to the spindles and blades.



Available in uplift and flat formation to suit mowing requirements, the unique tilt forward design minimises tensioning are maintenance-free. hang back in tough conditions.



LOW MAINTENANCE Zero daily maintenance. Spindles, roller bearings and auto-belt

ead**FAST** 6

STEADFAST SEALED SPINDLES We've eliminated the tedious task of regular greasing. Covered by our 3-year warranty, maintenance costs are reduced,



Provides easy access for removal of grass and drainage of water from belt chamber.



PRECISE HEIGHT ADJUSTMENT Clearly displayed indicators in both metric and imperial units and a high-tensile 2mm pitch adjuster for precise cut height



safety triangle to mower. **✓ GALVANIZED SURFACE COATING** Protect against corrosion in harsh

environments.

✓ ON CALL KIT

Each kit contains bearings blades and belts for a quick replacement in the



FULL WIDTH ROLLERS

Full width rollers minimise scalping in undulating conditions and allow mowing over kerbsides and bunkers. Also aids in striping.



ACCURATE SPINDLE SETTING TECHNOLOGY

Spindle height is perfectly aligned providing the most accurate cut possible.



STAND ON COVERS

Enables safe and easy access to the rear of the tractor when coupling the mower. Quick release latches allow easy removal for cleaning and servicing.





TRIMAX PROCUT/S5 FM

The front mounted version of the ever-popular rear linkage mounted Trimax PROCUT.

The Trimax ProCut FM is a robust machine engineered to withstand everyday use in the toughest commercial environments yet will deliver a clean cut - every time. In operation, the front-mounted ProCut Series 5 rides on the ground on its front wheels and rear roller. The front castor wheels and rear roller follow ground contours allowing easy manoeuvrability and prevent scalping. With out-front mowing the need for the operator to look behind is reduced and the tractor wheels do not flatten the uncut grass.

SPECIFICATIONS	178	210	237	290
Cutting Width	1.74m (5' 8 ½")	2.06m (6' 9")	2.32m (7' 7")	2.89m (9' 6")
Overall Width	1.91m (6' 3")	2.22m (7' 3 ½")	2.48m (8' 11/2")	3.05m (10' ½")
Overall Length	1.65m (5' 5")	1.72m (5' 8")	1.65m (5' 5")	1.65m (5' ½")
Height	1.08m (3' 6 ½")			
Cut Height Range	10 - 110mm (¾" - 4 ¼")	10 - 110mm (¾" - 4 ⅓")	10 - 110mm (¾" - 4 ¼")	10 - 110mm (¾" - 4 ⅓")
No. of Blade Spindles	3	3	4	5
Approx. Weight	569kg (1254lbs)	616kg (1358lbs)	675kg (1488lbs)	770kg (1697lbs)
Min PTO Output	35hp	40hp	45hp	55hp

^{*}Minimum PTO output is a guide only. Requirement varies with the type of work and the terrain

KEY APPLICATIONS.

✓ Municipalities
✓ Horticulture Aviation Racecourses

WHAT'S NEW ON PROCUT/S5 FM

Maintaining your mower has never been easier with all daily greasing requirements being removed with the implementation of the new Titan Roller Bearings. The new auto-belt tensioning system reduces belt maintenance and improves drive to the spindles for a cleaner, stronger cut.

✓ Education
✓ Sports Fields

PRODUCT FEATURES.



TITAN ROLLER BEARING SYSTEM The Trimax Titan roller bearing system is maintenance-free. requiring no regular greasing, and provides excellent retention.



Removes the need for belt adjustments and improves drive



LAZERBLADEZ™ Available in uplift and flat formation to suit mowing requirements, the unique tilt forward design minimises hang back in tough conditions.

PRECISE HEIGHT ADJUSTMENT

Clearly displayed indicators in

both metric and imperial units

and a high-tensile 2mm pitch

adjuster for precise cut height



LOW MAINTENANCE

Zero daily maintenance. Spindles, roller bearings and auto-belt tensioning are maintenance-free.

*OPTIONAL FEATURES.

✓ REAR MOUNT

Available in rear three-point linkage configuration with front and rear rollers for unmatched safety.

▼ ROLLER SCRAPERS

Cleans rollers and reduces clumping in wet conditions.

✓ OUATTRO BLADES

Four blades (flat, upturned or mixed) per spindle for a finer cut.

✓ NEXABLADES

Scientifically designed for high-end turf giving a superior cut and spread when it matters most.

✓ ON CALL KIT

Each kit contains bearings blades and belts for a quick replacement in the field.

to the spindles and blades.



STEADFAST SEALED SPINDLES We've eliminated the tedious

task of regular greasing. Covered by our 3-year warranty, maintenance costs are reduced, and productivity is enhanced.



FULL WIDTH ROLLERS

Full width rollers minimise scalping in undulating conditions and allow mowing over kerbsides and bunkers. Also aids in striping.



BELT CAVITY DUAL WASH FLAPS

Provides easy access for removal of

grass and drainage of water from

belt chamber.

ACCURATE SPINDLE SETTING TECHNOLOGY

Spindle height is perfectly aligned providing the most accurate cut possible.



STAND ON COVERS

alterations.

Enables safe and easy access to the rear of the tractor when coupling the mower. Quick release latches allow easy removal for cleaning and servicing.



TALK TO US TODAY ABOUT THE CAPABILITIES OF PROCUT SERIES 5 **FM** IN YOUR ENVIRONMENT.



TRIMAX TOPPER/S3

The Trimax TOPPER cuts pasture quickly and efficiently and has multiple features enabling its use on lower hp tractors.

Developed on a Waikato dairy farm in 1993, the Topper uses small diameter blades turning at high speed resulting in more cuts per forward metre than comparable pasture toppers, giving a finer cut and increasing regrowth and pasture quality. The high under-body clearance and open deck design allows good flow of grass into the mowing deck and a clean ejection of cut grass.

Powered by a proven belt drive system that now has auto belt tensioners, the Trimax Topper is more efficient than comparable shaft drive pasture toppers. Short in body from front to rear and mounting close to the tractor, the Topper is able to be used on smaller tractors for large cut widths and also enables a smaller turning radius for easier access into tight corners.







SPECIFICATIONS	237	282
Cutting Width	2.32m	2.74m
Overall Width	2.48m	2.91m
Overall Length	1.32m	1.39m
Height	0.99m	0.99m
Cut Height Range	20 - 160mm	20 - 160mm
No. of Blade Spindles	4	4
Approx. Weight	643kg	685kg
Min PTO Output	37hp	45hp

*Minimum PTO Output is a guide only. Requirement varies with the type of work and the terrain.



We use the Topper to keep up the quality of the grass behind the cows.
The farm tends to grow a lot of grass early on in the season and it's hard
to control, even with silage, so we top to keep the quality up. We get a nice
clean cut which means you get good regrowth. I wouldn't buy anything else.
- IAN WILCOX | Farmer, Matamata, NZ

KEY APPLICATIONS.

✓ Dairy Farms
✓ Agriculture
✓ Horse Agistment
✓ Aviation

WHAT'S NEW ON TOPPER

The Topper is now fitted with an automatic belt tensioning system improving its performance in heavy conditions. Stand on covers bring added durability whilst providing safe and easy access to the rear of a tractor when coupling.

THE BENEFITS OF PASTURE TOPPING.

✓ Improves feed quality
✓ Increases farm profitability
✓ Increases MS production
✓ Promotes faster re-growth

PRODUCT FEATURES.



EASIER MAINTENANCE

New latch system provides easier access to drive system and access to roller bearing grease nipple has been improved.



LOW HP REQUIREMENTS

Open deck design for grass processing, efficient belt drive system and a short mower front to rear allows for use on lower HP tractors.



ANTI-BLOCK SYSTEM

High tensile spindles feature antiwrap pins preventing frustrating blockages around spindles in extreme conditions.



AUTOMATIC BELT TENSIONER Eliminates the need for belt

adjustments and improves drive to the spindles and blades in longer grass.



LAZERBLADEZ™

Available in uplift and flat formation to suit mowing requirements, the unique tilt forward design minimises hang back in tough conditions.



IMPROVES FEED QUALITY

Topping controls poor quality pasture components such as seed-heads and thistles and prevents their reoccurance.



STAND ON BELT COVERS

Provides safe and easy access to the rear of tractor when coupling.



USTRY LEADIN

INCLUDES SPINDLES

EXPERIENCED SERVICE

ACCURATE HEIGHT SYSTEM

Height indicators are clearly displayed allowing for accurate and easy in field height adjustments



ADVANCED DESIGN

Short front to rear and mounting close to the tractor allowing better manoeuvrability. High under body clearance and open deck design for increased grass production.



HIGH SPINDLE SPEEDS

More spindles, higher spindle speeds and shorter blade beams yield more cuts per forward meter of travel resulting in clean cut pasture.



REAR ROLLER

The Topper is fitted with a rear roller, which ensures that in undulating environments you'll have increased protection from scalping.



TRIMAX STEALTH/S3

The STEALTH SERIES 3 has been designed to give a higher quality of cut, operate in a wider range of conditions, be safer, more robust, easier to operate and take less time to maintain than any previous STEALTH.

Backed by 30 years' of experience in market, the concept of Stealth Series 3 was born from the demand of our Australian customers for a mower that was more versatile in terms of long grass performance and more user friendly for both the operator and the workshop.

Backed by our industry leading 3-year warranty and our parts and technical support team, we know the Stealth Series 3 to be the best linkage wing mower for passive and active turf in the market.

SPECIFICATIONS	340
Cutting Width	3.4m (11' 2")
Overall Width	3.55m (11' 8")
Transport Width	2.42m (7' 11")
Overall Length	1.63m (5' 4")
Height (wings up)	1.21m (3' 11½")
Cut Height Range	10 - 90mm (¾" - 3½")
No. of Blade Spindles	5
Approx. Weight	940kg (2070lbs)
Min PTO Output	70hp

^{*}Minimum PTO output is a guide only. Requirement varies with the type of work and the terrain



The Stealth has brilliant decks with excellent grass dispersion and minimal greasing required. We can just jump in and cut grass!

- ROSS HAMNER Downer, Auckland, NZ

KEY APPLICATIONS.

- ✓ Municipalities ✓ Parks & Reserves ✓ Estates & Lifestyle Blocks ✓ Racecourses ✓ Sports Fields
- ✓ Horticulture
 ✓ Aviation

WHAT'S NEW ON STEALTH/S3

We've reduced the need for greasing through the introduction of new features such as SteadFast maintenance-free spindles and composite maintenance-free bushes. Stealth wing locks can now be operated from inside the tractor cab. Modifications have been made to the cutting chamber and the baffle design for improved cut quality and easy cleaning.

PRODUCT FEATURES.



LOCTEK

A stubless roller bearing system for vastly improved roller retention, alignment, bearing life and minimal maintenance



GREATER MOWING VERSATILITY

The improved cutting chamber and baffle design directs airflow from the blades out and over the rear roller for a better cut and spread.



BELT CAVITY DUAL WASH FLAPS

Provides easy access for removal of grass and drainage of water from belt cavity.



LOW MAINTENANCE

Reduced greasing requirements mean operators can spend more time mowing and less on maintenance.



EASY TO CLEAN

The improved belt chamber design results in easy cleaning, with the front openings allowing any grass to be easily washed out or removed.



ANTI-WEAR SKIDS

Anti-wear skids reduce wear on side channels when operating in rough or uneven terrain.



LAZERBLADEZ"

Available in up-lift and flat formation to suit mowing requirements, the unique tilt forward design minimises hang back in tough conditions.



EASY HEIGHT ADJUSTMENT

Clearly displayed stainless steel height indicators allow the easy adjustment of cut heights without having to raise or lower the wings and deck.



STAND ON COVERS

Enables safe and easy access to the rear of the tractor when coupling to the mower. Quick release latches allow easy removal for cleaning and servicing.

*OPTIONAL FEATURES.

▼ ROLLER SCRAPERS

Cleans rollers and reduces clumping in wet conditions.

✓ QUATTRO BLADES

Four blades (flat, upturned or mixed) per spindle for a finer cut.

✓ SERVICE STANDS

Lockable stands for safe underside access.

✓ LIGHTING KIT WITH STORAGE BRACKET

LED road lights, safety triangle, and bracket for storage box.

✓ STORAGE BOX

Easy access to spare parts and

✓ GALVANIZED SURFACE COATING Protect against corrosion in harsh

environments. ✓ ELECTRIC UNLOCK

Upgrade to electric actuation for the mower wings' transport lock.





TRIMAX STEALTH/S3 SR

The Trimax STEALTH SR combines the cut quality, safety, robustness, decreased maintenance time, and easy operation of STEALTH SERIES 3 with enhanced performance in long grass.

With even more versatility than the Stealth Series 3 for long grass applications, the Stealth SR is purpose-built for an excellent cut for grass up to 500mm. The cutting chamber and baffle design are optimised to provide a better finish and spread at higher cut heights.

New and improved design features make the Stealth SR safer, more operator friendly, and easier to maintain than ever.







340
3.4m (11' 2")
3.55m (11' 8")
2.42m (7' 11")
1.63m (5' 4")
1.21m (3' 11½")
40 - 90mm (1½" - 3½")
5
900kg (1984lbs)
60hp

^{*}Minimum PTO output is a guide only. Requirement varies with the type of work and the terrain

KEY APPLICATIONS.

- ✓ Passive Turf & Open Space ✓ Long grass applications ✓ Municipalities ✓ Parks & reserves
- ✓ Estates & Lifestyle Blocks ✓ Racecourses ✓ Sports fields ✓ Horticulture ✓ Aviation

WHAT'S NEW ON STEALTH/S3 SR

The Stealth SR incorporates all the new features of the Stealth S3. An anti-scalp roller on the front of the main mowing deck and bubble rollers on the wings are added to protect against scalping over contours.

PRODUCT FEATURES.



LOCTEK

A stubless roller bearing system for vastly improved roller retention. alignment, bearing life and minimal



ANTI-SCALP ROLLER

A raised front roller provides anti-scalp protection for your turf without impacting long grass performance.



IN-CAB UNLOCK SYSTEM Unlock the mower wings' transport

lock from the convenience of the tractor seat using the tractor's hvdraulic control lever.



LONG GRASS PERFORMANCE

Designed to mow grass up to 500mm high and achieve the quality cut you expect from Trimax.



EASY TO CLEAN

The improved belt chamber design results in easy cleaning, with the front openings allowing any grass to be easily washed out or removed.



LOW MAINTENANCE

Reduced greasing requirements mean operators can spend more time mowing and less on maintenance.



LAZERBLADEZ"

Available in up-lift and flat formation to suit mowing requirements, the unique tilt forward design minimises hang back in tough conditions.



EASY HEIGHT ADJUSTMENT

Clearly displayed stainless steel height indicators allow the easy adjustment of cut heights without having to raise or lower the wings and deck.



rear of the tractor when coupling to the mower. Ouick release latches allow easy removal for cleaning and servicing.

*OPTIONAL FEATURES.

▼ ROLLER SCRAPERS

Cleans rollers and reduces clumping in wet conditions.

✓ SERVICE STANDS

Lockable stands for safe underside

✓ LIGHTING KIT WITH STORAGE BRACKET

LED road lights, safety triangle, and bracket for storage box.

✓ STORAGE BOX

Easy access to spare parts and

✓ GALVANIZED SURFACE COATING

Protect against corrosion in harsh environments.

✓ ELECTRIC UNLOCK

Upgrade to electric actuation for the mower wings' transport lock.







The Trimax SNAKE is used on some of the most prestigious golf courses around the world. The cutting system has been studied by the Sports Turf Institute of New Zealand and declared to produce a cut of equal quality to cylinder mowers however with the versatility and reliability of our famous rotary design.

SNAKE/S2

An accumulation of over 40 years of Trimax innovation, engineering and customer insight, the Snake has been designed specifically for sports turf and golf courses. We've seamlessly combined our world class cut quality and articulation capabilities and believe we've created the best sports turf rotary mower in the world. Built for agility, incredibly robust and extremely low maintenance the Trimax Snake won't fail to impress.

SPECIFICATIONS 400 **Cutting Width** 3.23m (10'7") 3.99m (13'1") Overall Width 3.37m (11'1") 4.11m (13' 6") **Overall Length** 3.5m (11' 6") 3.5m (11' 6") **Transport Width** 2.1m (6' 101/2") 2.14m (7' 1/4") 1.82m (5' 111/2") 2.21m (7' 31/2") **Transport Height** 10 - 100mm (3/1 - 4") 10 - 100mm (3/8 - 4") **Cut Height Range** No. of Blade Spindles 9 11 Approx. Weight 1250kg (2756lbs) 1390kg (3064lbs) Min PTO Output 45hp 35hp

^{*}Minimum PTO output is a guide only. Requirement varies with the type of work and the terrain



The first time I saw the Snake cut the grass I was really impressed at the speed and the striping finish. I'd recommend the Snake to anyone. ROY | Head Groundsman, Hampton Downs, NZ

KEY APPLICATIONS.

- ✓ Golf Courses (Roughs & Fairways)
 ✓ Sports Fields
 ✓ Turf/Sod Farms
 ✓ Municipalities
- ✓ Schools ✓ Large Estates & Country Clubs

WHAT'S NEW ON SNAKE S2

The Snake Series 2 includes the new Trimax LocTEK stubless roller bearing retention system. The roller thickness has been increased to 5mm. The Snake now features replaceable axle stubs, a 90-degree rotatable jack stand, and maintenance-free pivot bushes.

PRODUCT FEATURES.



LOCTEK

A stubless roller bearing system for vastly improved roller retention. alignment, bearing life and minimal



FULL WIDTH ROLLERS

Full width rollers minimise scalping in undulating conditions and allow mowing over kerbsides and bunkers. Also aides in striping.



ZERO TURN

Allows continuous cutting while turning sharply for maximum productivity.



AUTOMATIC BELT TENSIONERS

Automatic belt tensioners eliminate the need for belt adjustments and improves drive to the spindles and blades.



QUIKLIFT

QuikLIFT enables decks to be raised slightly for traversing paths without the need to disengage the PTO. Also aides in striping.



ARTICULATION ABILITY

With three articulating decks the Snake has the ability to follow contours.



Available in uplift and flat formation to suit mowing requirements, the unique tilt forward design minimises hang back in tough conditions.



EASY HEIGHT ADJUSTMENT

Clearly displayed stainless steel height indicators allow the easy adjustment of cut heights without having to raise or lower the decks.



LOW MAINTENANCE

SteadFast sealed spindles have eliminated the tedious task of regular greasing. Snake Series 2 now also features maintenance free pivot bushes.

*OPTIONAL FEATURES.

✓ ANTI-BOUNCE / WEAR SKIDS Eliminates scalping and bouncing and reduces side channel wear.

▼ ROLLER SCRAPERS Cleans rollers and reduces clumping

in wet conditions. **✓ MULTI LIFT SYSTEM**

Five different lift functions for mower decks. Now with Drive Protect.

▼ ROAD RATED TYRE

Tow at highway speeds on the road. **✓ REMOTE UNLOCK**

Unlocks decks electronically or hydraulically from the tractor seat. **✓** MUDGUARDS, LIGHTS, & CHAINS Add LED tail light clusters, safety chains, and transport wheel mudguards for increased safety during road transportation. ✓ MULCH KIT

Save on purchasing dedicated leaf blowing and collection units with the Snake Mulch Kit. Retrofittable to existing Snake S1 & S2 models.



PEGASUS/S5



TRIMAX PEGASUS 55

The Trimax Pegasus sets the benchmark in wide area mowing for parks, reserves, airports, racecourses, sports fields, turf farms, and more.

For over 20 years, the Trimax Pegasus has been leading the way in wide-area mowing. Introduced in 2001 as the world's first multideck roller mower, the Pegasus is renowned for its robustness and versatility. Its fast spindle speeds and deep mowing decks deliver the highest quality cut and finish every time, and articulating decks provide a consistent cut over light to moderate contours.

The Pegasus S5 builds on the incredible strength, durability, versatility, and efficiency of the previous series to increase machine life and decrease downtime in full-time commercial applications.

PECIFICATIONS	493	610	722	
utting Width	4.94m (16' 2")	6.09m (19' 11")	7.23m (23' 9	
verall Width	5.1m (16' 9")	6.25m (20' 6")	7.39m (24' 3	

SPECIFICATIONS	493	610	122
Cutting Width	4.94m (16' 2")	6.09m (19' 11")	7.23m (23' 9")
Overall Width	5.1m (16' 9")	6.25m (20' 6")	7.39m (24' 3")
Overall Length	4.65m (15' 3")	4.65m (15' 3")	4.65m (15' 3")
Transport Width	2.53m (8' 3¾")	2.53m (8' 3¾")	2.53m (8' 3i thi¾")
Transport Height	2.62m (8' 7")	3.2m (10' 6")	3.8m (12' 6")
Cut Height Range	10 - 110mm (¾" - 4¼")	10 - 110mm (¾" - 4½")	10 - 110mm (¾" - 4½")
No. of Blade Spindles	9	11	13
Approx. Weight	2200kg (4895lbs)	2440kg (5380lbs)	2660kg (5865lbs)
Min PTO Output	50hp	55hp	60hp

^{*}Minimum PTO output is a quide only. Requirement varies with the type of work and the terrain

KEY APPLICATIONS.

- ✓ Turf / Sod Farm ✓ Parks & Reserves
 ✓ Racecourses, Polo, & Sports Turf
- Aviation Large Estates

WHAT'S NEW ON PEGASUS S5

The Pegasus chassis and outrigger arms have been completely redesigned to increase strength without adding unnecessary weight. Larger wheels decrease ground pressure and support a wider range of tyre options. Maintenance-free features have been introduced.



PRODUCT FEATURES.



ROBUST CHASSIS

10% stronger under tough travel conditions, twice the durability in deck lifting and lowering, and a 60% increase in rigidity in the outrigger arms from Pegasus S4.



IMPACT PROTECTION

Outrigger arms and side channel leading edges have been redesigned for increased impact protection.



SUSPENSION

The new Pegasus S5 Flexiride Torque Suspension System is designed for increased strength and smoother travel at highway speeds.



LOW MAINTENANCE

Zero daily greasing for an 80% reduction in annual grease consumption. Spindles, roller bearings, and auto-belt tensioning are maintenance-free.



QUIKLIFT

Enables mower decks to be raised without disengaging the PTO to traverse driveways, footpaths and pavements. Now a standard inclusion for all Pegasus models.



HEIGHT ADJUSTMENT

Clearly displayed indicators in both metric and imperial units and a high-tensile 2mm pitch adjuster for precise cut height alterations.



TITAN ROLLER BEARING SYSTEM

The Trimax Titan roller bearing system is maintenance-free, requiring no regular greasing, and provides excellent retention.



SAFETY COMPLIANT

Complies with international safety standards and can be used with confidence on the roads and in public spaces.



STAND ON BELT COVERS

Provides safe and easy access to the chassis.

*OPTIONAL FEATURES.

✓ ANTI-BOUNCE / WEAR SKIDS Eliminates scalping and bouncing

and reduces side channel wear.

▼ ROLLER SCRAPERS

Cleans rollers and reduces clumping in wet conditions.

✓ QUATTRO BLADE SYSTEM

Four blades (flat, upturned or mixed) per spindle for a finer cut.

✓ ELECTRIC UNLOCK Unlocks decks electronically from

✓ MULTI-LIFT SYSTEM Five different lift functions for mower decks. Now with Drive

Protect. **✓** TURF TYRES

the tractor seat.

Distributes mower weight for less ground disturbance.

✓ SPARE ROAD TYRE & MOUNT

Mounts a spare wheel to the rear mowing deck.

✓ STORAGE KIT

Mounts a toolbox to the mower chassis.

✓ GALVANIZED

Protect against corrosion in harsh environments.

✓ ELECTRIC BRAKES

WITH BREAKAWAY Reduces braking force required by

the tractor.

✓ ROAD KIT

Adds lights, signage, and beacons to the mower.

✓ MUDGUARDS

Available for both road tyres and turf tyres.

✓ NEXABLADES

Scientifically designed for high-end turf giving a superior cut and spread when it matters most.





TRIMAX X-MAM

The X-WAM has superior contourfollowing abilities based on the unique combination of five individual floating decks on an articulated axis.

With the potential to cut 13 hectares per hour and the ability to perform zero-turns without having to lift any of the mower decks, the X-WAM will increase your productivity and efficiency using only one tractor, one driver, and one mower.

Providing an even discharge of clippings and with the ability to mow in wet conditions and produce a cylinderlike patterned finish, X-WAM is the ultimate wide area mower.

SPECIFICATIONS 10400 **Cutting Width** 10.41m (34' 2") **Overall Width** 10.54m (34'7") **Overall Length** 5.83m (19'1") **Transport Width** 2.74m (9') 4.45m (14' 7") **Transport Height Cut Height Range** 10 - 100mm (³/₈" - 4") No. of Blade Spindles Approx. Weight 4880kg (10759lbs) Min PTO Output 90hp

*Minimum PTO output is a guide only. Requirement varies with the type of work and the terrain



Trimax X-WAM is great equipment. It replaced one tractor, one employee and reduced mowing time. Less equipment to maintain and less equipment expense has increased our profitability.

- LYNN GIBB | Hope Plantation Turf, Texas USA

KEY APPLICATIONS.

✓ Turf / Sod Farm

WHAT'S NEW ON X-WAM

The X-WAM is Trimax's widest mower, with 5 full-sized mowing decks. It is available as a complete model or as a kit to add to the Trimax Pegasus 610. The decks can be retracted for transport.

PRODUCT FEATURES.




LOCTEK

A stubless roller bearing system for vastly improved roller retention, alignment, bearing life and minimal maintenance.



WHEELS RUN ON CUT GRASS

As the rear deck is located between the rear transport wheels, grass is not flattened by wheels prior to mowing, a feature unique to Trimax.



Trimax Turf Tyres help distribute the weight of the mower for less ground disturbance. Recommended for Turf Farms or fine turf applications.



FULL HYDRAULIC OPERATION

The X-WAM uses full hydraulic operation for deck retraction into road transport mode.



LOW MAINTENANCE

All moving surfaces have long life synthetic bushes or greasable bearings and remote grease points for hassle-free maintenance.



ULTIMATE CONTOUR FOLLOWING

Contour following and cut quality is compromised when decks are over 3m wide. The X-WAM features multiple smaller decks for superior cut quality.



LAZERBLADEZ"

Available in uplift and flat formation to suit mowing requirements, the unique tilt forward design minimises hang back in tough conditions.



RAPIDSET HEIGHT ADJUSTMENT

Clearly displayed stainless steel height indicators allow the easy adjustment of cut heights without having to raise or lower the wings.

STEADFAST SEALED SPINDLES

regular greasing. Covered by our 3-year warranty, maintenance costs are reduced, and productivity is enhanced.

*OPTIONAL FEATURES.

✓ ANTI-BOUNCE / WEAR SKIDS

Eliminates scalping and bouncing and reduces side channel wear.

▼ ROLLER SCRAPERS

Cleans rollers and reduces clumping in wet conditions.

✓ QUATTRO BLADES

Four blades (flat, upturned or mixed) per spindle for a finer cut.

✓ GALVANIZED SURFACE COATING

Protect against corrosion in harsh environments.



We've eliminated the tedious task of



TRIMAX FLAILDEK FX

The Trimax FlailDek FX offers a high-performance alternative to standard factory-fitted rotary mowing attachments.

FlailDek FX has the ability to deliver an exceptionally clean cut and disperse clippings safely and is used by contractors, councils, schools and land owners around the world. A highly versatile mower, FlailDek FX is also able to mulch branches up to 25mm in diameter, mow high grass and using the unique converter flap is suitable for sports fields and other fine turf applications.

The FlailDek FX has been designed to have minimal maintenance requirements and a low total cost of ownership yet deliver maximum reliability.

SPECIFICATIONS	135	155	185
Cutting Width	1.36m (4' 6")	1.52m (5')	1.83m (6')
Overall Width	1.56m (5' 1½")	1.72m (5' 8")	2.05m (6' 8½")
Overall Length	1.1m (3" 7)	1.1m (3' 7")	1.1m (3'7")
Overall Height	0.37m (1' 2½")	0.37m (1' 2½")	0.37m (1' 2½")
Cut Height Range	20 - 100mm (¾" - 4")) 20 - 100mm (¾" - 4")) 20 - 100mm (¾" - 4")
Approx. Weight	210kg (460lbs)	225kg (495lbs)	250kg (550lbs)
Total Belts	2	2	2
No. of Flails	28	32	40
Hydraulic Drive	N/A	Optional	N/A
Min PTO Output	N/A	N/A	N/A

*Minimum PTO output is a guide only. Requirement varies with the type of work and the terrain



This year I could not have coped without anything other than a Trimax FlailDek, it's versatile, cuts rough and fine grass even in the wet conditions and copes with it easily.

ANDREW HALL | Truelink Ltd

KEY APPLICATIONS.

✓ Horticulture
✓ Municipalities
✓ Golf course roughs
✓ Racecourses
✓ Sports Fields

✓ Schools
✓ Aviation

WHAT'S NEW ON FLAILDEK/FX

Strength and durability are increased from the original FlailDek design with the incorporation of a high tensile steel body, a 70% stronger rotor, a stronger gearbox, and forged steel Trimax Gamma Flails. The unique converter has also been added.



PRODUCT FEATURES.



UNIQUE CONVERTER

Superb short grass cutting ability by creating airflow that lifts grass before it's cut. Open converter for increased productivity in long grass environments.



SAFE CLIPPING DISPERSION

Safety is paramount when mowing in public areas. This is why Trimax has designed the FlailDek FX to expel debris in a downward direction behind the mower.



REAR ROLLER

Full width rear roller prevents scalping, permits the edge of the mower to be run along kerbs, adds to overall safety and produces striping.



FRONT CASTOR WHEELS

Front castor wheels allow the FlailDek FX to follow ground contours independently from the tractor. The semi-pneumatic tires are impossible to puncture.



POWER SAVING FLAILS

Strong forged steel flail with an aerodynamic profile reduces hp requirements yet generates sufficient draught to lift grass for a clean cut.



NEW IMPROVED ROTOR

Dynamically balanced and designed for durability to withstand everyday use in the toughest mowing environments.



from abrasion-resistant steel extends bearing life and enables high productivity in the most challenging environments.







TRIMAX EZEEMOW/FX

The EZEEMOW FX is the ideal partner for your compact tractor where versatility and robustness is needed.

With its compact dimension, Ezeemow FX can fit closely to the tractor and manoeuvre into tight corners. Able to mow anything from fine turf to small prunings, vegetation up to 25mm in diameter and high grass, the Ezeemow FX can transform areas into tidy mown lawn in a single pass. This versatility makes the Ezeemow FX ideal for contractors, councils, roadsides, estates, and orchard applications.

The Ezeemow FX has been designed to have minimal maintenance requirements and low total cost of ownership yet deliver maximum reliability.

W.			
SPECIFICATIONS	135	155	185
Cutting Width	1.36m (4' 6")	1.52m (5')	1.83m (6')
Overall Width	1.56m (5' 1½")	1.72m (5' 8")	2.05m (6' 8½")
Overall Length	0.58m (1' 11")	0.58m (1' 11")	0.58m (1' 11")
Overall Height	0.37m (1' 2½")	0.37m (1' 2½")	0.37m (1' 2½")
Cut Height Range	10 - 100mm (¾" - 4")	10 - 100mm (¾" - 4")	10 - 100mm (¾" - 4")
Approx. Weight	180kg (396lbs)	200kg (440lbs)	225kg (495lbs)
Total Belts	2	2	2
No. of Flails	28	32	40
Min PTO Output	17hp	20hp	24hp

*Minimum PTO output is a guide only. Requirement varies with the type of work and the terrain



I've been mowing 30hrs a week for over 28 years and my Ezeemow still has the same qearbox. It produces a beautiful cut and if I had to, I'd replace it with the exact same model..no two ways about it!

STEVE DE BRUIN | Grass Cutting Services, Tauranga NZ

KEY APPLICATIONS.

✓ Estates & Lifestyle Blocks ✓ Orchards & Vineyards ✓ Horticulture ✓ Municipalities ✓ Horse Agistment

WHAT'S NEW ON EZEEMOW/FX

Strength and durability are increased from the original Ezeemow design with the incorporation of a high tensile steel body, a 70% stronger rotor, a stronger gearbox, and forged steel Trimax Gamma Flails. The unique converter, an improved belt tensioning system, and easy height adjustment on the full width roller have also been added.



PRODUCT FEATURES.



UNIQUE CONVERTER

Superb short grass cutting ability by creating airflow that lifts grass before it's cut. For work in heavy environments, lift converter for increased productivity.



REAR ROLLER

EZEEZMOW OFFSET

ONLY AVAILABLE IN FIXED CENTRE MOUNT OR OFFSET POSITIONS

DIAGRAM

Full width rear roller prevents scalping, permits the edge of the mower to be run along kerbs, adds to overall safety and produces striping.



SAFE CLIPPING DISPERSION

Safety is paramount when mowing in public areas. This is why Trimax has designed the Ezeemow FX to expel debris in a downward direction



POWER SAVING FLAILS

Strong forged steel flail with an aerodynamic profile reduces hp draught to lift grass for a clean cut.



*RIGHT-HAND OFFSET

Comes standard with a centre mount but is available in a right-hand requirements yet generates sufficient offset to suit your specific mowing






for durability to withstand everyday use in the toughest mowing environments.



. 879mm Centre Mo

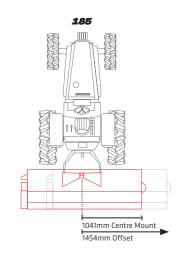

TALK TO US TODAY ABOUT THE CAPABILITIES OF EZEEMOW FX IN YOUR ENVIRONMENT.

VIEW MORE PHOTOS, VIDEOS, AND INFORMATION ABOUT THE TRIMAX EZEEMOW FX ONLINE HERE:





TRIMAX FORCE

The Trimax Force is the multitool mower and mulcher you need to get the job done, no matter what that job might be. Turn long grass and large prunings into an expertly cut and finely mulched field in a single pass.

As Trimax's strongest and most adaptable flail mower yet, with a wide range of options available for custom configuration, the Force can easily be tailored to produce a pristine cut and superior finish in almost any application. For reliable productivity and excellent results, the Trimax Force is the ultimate choice.







SPECS	115	145	175	205	235
Cutting Width	1.15m	1.44m	1.73m	2.02m	2.3m
	(3' 9 ½")	(4' 8 ¾")	(5' 8 ½")	(6' 7 ¾")	(7' 6 ¾")
Overall Width	1.45m	1.73m	2.02m	2.31m	2.59m
	(4' 8 ⁷ / ₈ ")	(5' 8 ½")	(6' 7 ¾")	(7' 7")	(8' 5 %")
Overall Length	1.15m	1.15m	1.15m	1.15m	1.15m
	(3' 9 ½")	(3' 9 ½")	(3' 9 ½")	(3' 9 ½")	(3' 9 ½")
Overall Height	0.5m	0.5m	0.5m	0.5m	0.5m
	(1' 7 ¾")	(1' 7 ¾'')	(1' 7 ¾'')	(1' 7 ¾'')	(1' 7 ¾")
Cut Height	0 - 60mm	0 - 60mm	0 - 60mm	0 - 60mm	0 - 60mm
Range	(0 - 2 ¾")	(0 - 2 ¾")	(0 - 2 ¾")	(0 - 2 ¾")	(0 - 2 ¾")
Approx. Weight	590kg	650kg	755kg	815kg	870kg
	(1300lbs)	(1435lbs)	(1665lbs)	(1795lbs)	(1920lbs)
Flails	16	20	24	28	32
Min PTO Output	30hp	35hp	40hp	45hp	50hp
*Minimum PTO Outpu	ıt is a guide onl	y. Requirement	varies with the	type of work an	d the terrain.

KEY APPLICATIONS.

✓ Orchards ✓ Vineyards ✓ Roadsides ✓ Parks & Reserves ✓ Turf Farms ✓ Estates & Lifestyle Blocks

WHAT'S NEW ON FORCE.

Strength and durability have been increased, including 50% thicker endplates and a newly designed rotor bearing assembly with over 35% higher load capacity than Trimax's previous flail mowers. Zero-maintenance features and a wider array of options have also been introduced.

PRODUCT FEATURES.



MOW AND MULCH WITH **ONE MACHINE**

Mow grass to a fine finish and mulch prunings up to 90mm in diameter with one machine.



impact zones.

DISCHARGE CONTROL

The coarseness of mulch can be controlled by adjusting the height of the rear flap.



or right-hand offset with an additional 500mm of hydraulic side shift. Available on the 175, 205, and 235 models.



AUTO BELT TENSIONING SMOOTH EXTERNAL PROFILE

The belt system is equipped with New internal rotor bearings automatic tensioners to optimize create a smooth external profile drive to the rotor without requiring and provide a closer cut around manual adjustments. obstacles.



LOW MAINTENANCE

Easily accessible grease locations A 6mm replaceable internal liner reduces noise and increases and maintenance-free features durability in the mower's highmake regular service quicker and easier than ever.



MAINTENANCE-FREE

New highly-rated sealed roller bearing stacks require no regular greasing.



ROLLER BEARINGS



easily removed or replaced.

*OPTIONAL FEATURES.

→ HEAVY DUTY LINER

Increases durability in the mower's high impact zone.

→ HEAVY DUTY ROLLER

Increases roller wall thickness from 5mm to 11mm.

✓ ROLLER SCRAPERS

Cleans rollers and reduces clumping in wet conditions.

✓ MULCHING COUNTERBLADES

Produces an ultra-fine mulch. **→ PRUNING RAKES**

Collects prunings into the cutting chamber.

✓ LIGHTING KIT WITH STORAGE BRACKET

LED road lights, safety triangle, and bracket for storage box.

✓ STORAGE BOX

Easy access to spare parts and tools.









Extremely versatile, the Trimax WARLORD S3 is bound to dominate any environment you put it in - handling long and short grass, prunings up to 75mm in diameter, turf ribbons and offcuts with ease.

Tame rough patches full of scrub and branches in one pass and leave behind a field of evenly distributed mulch and clippings. Control the coarseness of discharge with Warlord's adjustable rear flap while safely dispersing clippings. The Trimax Warlord is tough and durable, requiring minimal maintenance and simplifying repairs to keep your machine running for years. Spend less time and money keeping your mower operating at 100%.

The Trimax Warlord S3 is a medium duty mower/mulcher suitable for a wide range of applications including sod and turf farming, horticulture, passive turf management, contracting/hire, and land reclamation.

OF WARLORD SERIES 3 IN YOUR ENVIRONMENT.

TALK TO US TODAY ABOUT THE CAPABILITIES







SPECIFICATIONS	175	205	235
Cutting Width	1.74m (5' 9")	2.04m (6' 8")	2.34m (7' 8")
Overall Width	2.04m (6' 8")	2.34m (7' 8")	2.66m (8' 8")
Overall Length	1.05m (3' 5")	1.05m (3' 5")	1.05m (3' 5")
Overall Height	0.55m (1'10")	0.55m (1'10")	0.55m (1' 10")
Cut Height Range	0 - 70mm (0 - 2¾")	0 - 70mm (0 - 2¾")	0 - 70mm (0 - 2 ³ / ₄ ")
Approx. Weight	690kg (1520lbs)	750kg (1650lbs)	810kg (1780lbs)
No. of Flails	24	28	32
Min PTO Output	40hp	44hp	49hp
*Minimum DTO output is a guide only Dequirement varies with the type of work and the taxoin			

^{*}Minimum PTO output is a guide only. Requirement varies with the type of work and the terrain



We do a lot of roadside work for councils, shires and local government. We use the Warlord where it's too tough for other machines, from my past experience it stands head and shoulders above the rest.

ALAN CHAPEL | AML Turf, Wodonga QLD

- ✓ Turf Farms
- Aviation
- Racecourses





*OPTIONAL

in wet conditions.

FEATURES. **▼** ROLLER SCRAPERS

Cleans rollers and reduces clumping

The hydraulic side shift and discharge control capabilities are new from the previous Warlord series, further



REPLACEABLE INTERNAL LINER

A bolt-in 6mm replaceable internal liner increases the life of the body, minimises damage and reduces noise. can be replaced when required.



Fine mulch is produced with the flap in the lowest position. Controlling discharge assists with safety in public spaces. Lift flap open for easy flail servicing.



REPLACEABLE SKIDS

Skids on Warlord trailing arms prolong Warlord is configured with rightmower life in demanding terrain and



Helps direct prunings in and under

the mower. Also helps keep debris


away from the hydraulic system.


RIGHT HAND OFFSET

PRUNING GUIDE

hand offset for increased over-theshoulder visibility.

WARLORD **OFFSET** DIAGRAM HYDRAULIC SIDE SHIFT / RIGHT-HAND SIDE SHIFT ONLY

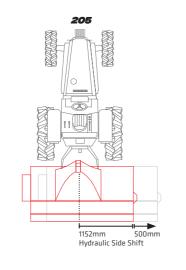

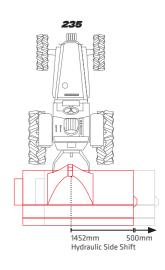

VIEW MORE PHOTOS, VIDEOS, AND INFORMATION ABOUT THE **TRIMAX WARLORD SERIES 3** ONLINE HERE:

WANT TO KNOW MORE? FIND US ONLINE.

THE TRIMAX WEBSITE.

The Trimax website contains more information, photos, and videos of our products and features.


TRIMAXMOWERS.CO.NZ



OR USE THIS **QR CODE**

THE TRIMAX RESOURCE CENTRE.

Easily accessed from the main website, the **Trimax Resource** Centre provides everything you need to easily service and maintain your Trimax mower. Best of all. it's completely free.

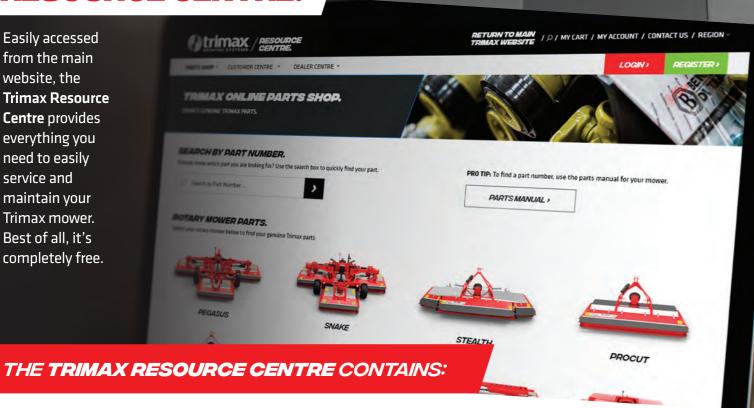

THE TRIMAX

CUSTOMER CENTRE.

- Watch step-by-step service and setup videos.
- Download maintenance checklists.
- Access the operator manual and parts manual for your mower.
- Read instructions for installing Trimax Genuine Spare Parts.
- Register warranty or file a claim.



THE TRIMAX PARTS SHOP.

- Order Trimax Genuine Parts and Service Kits
- Review past orders.
- Upload bulk orders for quick and easy fleet maintenance.
- Quickly find common parts.
- Now with improved search functionality find exactly the part you need.



WHEN DOWNTIME IS NOT AN OPTION, SAVE MONEY ON EQUIPMENT THAT LASTS. YOU CAN COUNT ON TRIMAX.

2 LOW TOTAL ## COST OF OWNERSHIP.

- Long commercial life, with mowers 35 years old and counting still in the field.
- Reduced time, labour, and fuel requirements for each job.
- Affordable aftermarket parts guaranteed to meet Trimax quality standards

RELIABLE SUPPORT.

- Next-day parts dispatch from our local warehouse in Tauranga.
- > Knowledgeable local service staff and easy-toaccess online resources.
- Industry-leading 3-year warranty which includes spindles and gearboxes.

PRODUCTIVITY-BOOSTING EFFICIENCY.

- Less time in the shop with minimised and simplified service requirements.
- Designed for/tested in the harshest environments for maximum uptime in normal commercial operations.
- A wide range of available options to customise for your specific needs.

TRIMAX BUILDS MOWERS THAT LAST, AND WE BACK THAT UP BY OFFERING THE LONGEST AND **MOST COMPREHENSIVE** WARRANTY IN THE INDUSTRY.

All Trimax mowers come with a standard 12-month warranty with the opportunity to extend another 24 months by registering new machines online

- V COVERS SPINDLES
- ∨ COVERS GEARBOXES
- *▼ ABSOLUTELY FREE*



TRIMAX MOWING SYSTEMS

70 Maleme Street, Tauranga 3140 P 07 541 0411 / E info@trimaxmowers.co.nz

FOR MOWER SALES

P 07 543 1892 / E info@trimaxmowers.co.nz

FOR PARTS ORDERS

P 07 543 1897 / **E** parts@trimaxmowers.co.nz













f y d in v // Trimaxmowers.co.nz