



 **trimax**  
MOWING SYSTEMS // **POWERING  
PERFORMANCE.**

**PRODUCT CATALOGUE.**

★★★  
**INDUSTRY LEADING  
WARRANTY**

**3**  
YEAR

INCLUDES SPINDLES  
& GEARBOXES

EXPERIENCED SERVICE  
& SUPPORT NETWORK

\* T & Cs APPLY





“OUR APPROACH TO INNOVATION IS DRIVEN BY YOU. WITH A FOCUS ON CREATING SOLUTIONS TO YOUR CHALLENGES, TOGETHER, WE’RE ABLE TO RAISE THE BAR ON RESULTS.”

– BOB SIEVWRIGHT  
TRIMAX MOWING SYSTEMS  
OWNER/FOUNDER

– MICHAEL SIEVWRIGHT  
TRIMAX MOWING SYSTEMS  
CEO



DESIGNED &  
MANUFACTURED IN  
**NZ**

ROTARY MOWERS.



**STRIKER**



**PROCUT/S5 SR**



**TOPPER/S3**



**STEALTH/S3**



**SNAKE/S3**



**PEGASUS/S5 SR**



**X-WAM /S5 ZR**



**PROCUT/S5**



**PROCUT/S5 FM**



**FURY**



**STEALTH/S3 SR**



**PEGASUS/S5**



**X-WAM/S5**

FLAIL MOWERS.



**FLAILDEK/FX**



**FORCE**



**EZEEMOW/FX**




**WARLORD/S3**



# TRIMAX STRIKER

**FAST BECOMING  
THE MOWER OF  
CHOICE AMONGST  
GROUNDSMEN.**

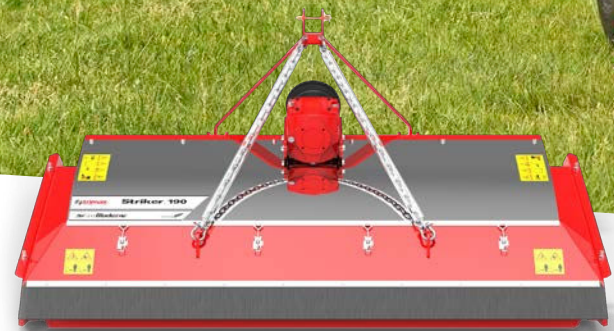

## TRIMAX STRIKER

Trimax STRIKER is a multi-spindled rotary mower with extremely low maintenance requirements and is ideal for use on compact tractors.

The Trimax Striker is designed to give a high cut quality and an excellent spread of clippings. Highly versatile, the Striker is capable of mowing grass 10 to 100mm. With an enclosed cutting chamber and a downward rear dispersion of clippings, the Striker has surpassed international safety standards making it one of the safest mowers on the market for use in public spaces.

Fitted with Trimax's exclusive LazerBladez™, the Striker can produce a cut and finish to rival that of a cylinder mower and is ideal for educational and sports facilities where presentation is key!

**TALK TO US TODAY ABOUT THE CAPABILITIES  
OF STRIKER IN YOUR ENVIRONMENT.**



SPECIFICATIONS	150	190
Cutting Width	1.46m (4' 9 ½")	1.94m (6' 4 ½")
Overall Width	1.56m (5' 1 ½")	2.04m (6' 8 ½")
Overall Length	1.16m (3' 9 ½")	1.16m (3' 9 ½")
Height	0.83m (2' 8 ½")	0.83m (2' 8 ½")
Cut Height Range	10 - 100mm (¾" - 4")	10 - 100mm (¾" - 4")
No. of Blade Spindles	3	4
Approx. Weight	322kg (710lbs)	400kg (882lbs)
Min PTO Output	25hp	30hp

\*Minimum PTO output is a guide only. Requirement varies with the type of work and the terrain



*The Striker has been built to withstand all conditions, a good solid mower. We had a test mow on delivery, the grass was about 150mm high and wet, it went great, made a good even cut leaving an even spread of cut grass, we thought it was the best mower we had ever seen.*

**- IAN DUFTY** Morrinsville, NZ

### KEY APPLICATIONS.

✓ School & Sports Fields ✓ Golf & Country Club ✓ Lifestyle & Estates

### WHAT'S NEW ON STRIKER

The Striker was originally designed as a compact solution for sports turf, especially for grounds maintenance for local football and cricket clubs. It features a simpler pan construction than the ProCut and includes maintenance-free ball bearing spindles.

\*\*\*  
**INDUSTRY LEADING  
WARRANTY**

**3  
YEAR** | INCLUDES SPINDLES  
& GEARBOXES  
EXPERIENCED SERVICE  
& SUPPORT NETWORK



### PRODUCT FEATURES.



#### LOW COST OF OWNERSHIP

With only 4 grease points on the mower and with robust sealed spindles, the Trimax Striker has incredibly low maintenance requirements.



#### LAZERBLADEZ™

Available in uplift and flat formation to suit mowing requirements, the unique tilt forward design minimises hang back in tough conditions.



#### STRIPING CAPABLE

Fitted with full width front and rear rollers, the Striker can produce striped patterned turf for those spaces where presentation is key.



#### SAFETY FOR PUBLIC PLACES

Striker exceeds international safety standards, and can be used with confidence in public spaces, school sports fields and confined areas.



#### ADVANCED ENGINEERING

Trimax's meticulous design process combined with bespoke, innovative manufacturing technologies produce the most accurate rotary cutting in the market.



#### COMPACT TRACTOR SUITABLE

Able to be paired with tractors as low as 25hp, the Striker is perfect for smaller budgets and compact tractors.

### \*OPTIONAL FEATURES.

#### ✓ ROLLER SCRAPERS

Cleans rollers and reduces clumping in wet conditions.

#### ✓ NEXABLADES

Scientifically designed for high-end turf giving a superior cut and spread when it matters most.

**VIEW MORE PHOTOS, VIDEOS, AND INFORMATION  
ABOUT THE TRIMAX STRIKER ONLINE HERE:**





# TRIMAX PROCUT/S5



## TRIMAX PROCUT/S5

A highly versatile roller mower, the PROCUT SERIES 5 is a multi-spindled roller mower designed to give a high cut quality and a great spread of clippings. The ProCut has been a successful part of the Trimax range for over 30 years. Mowing parks, reserves, school grounds, sports fields and golf courses around the world – From the grounds of Windsor Castle to your local community sports fields. The ProCut Series 5, released in 2023 is excellence refined. The ProCut S5 builds on the market leading cut and spread quality of the previous series whilst removing all daily maintenance requirements making it the perfect solution for a variety of commercial environments.

TALK TO US TODAY ABOUT THE CAPABILITIES OF PROCUT SERIES 5 IN YOUR ENVIRONMENT.

ENGINEERED TO WITHSTAND  
EVERYDAY USE IN THE  
TOUGHEST COMMERCIAL  
ENVIRONMENTS.

	178	210	237	290
<b>Cutting Width</b>	1.74m (5' 8 1/2")	2.06m (6' 9")	2.32m (7' 7")	2.89m (9' 6")
<b>Overall Width</b>	1.89m (6' 2 1/2")	2.21m (7' 3")	2.47m (8' 1")	3.04m (10')
<b>Overall Length</b>	1.44m (4' 9")	1.51m (4' 11 1/2")	1.44m (4' 9")	1.44m (4' 9")
<b>Height</b>	1.08m (3' 6 1/2")	1.08m (3' 6 1/2")	1.08m (3' 6 1/2")	1.08m (3' 6 1/2")
<b>Cut Height Range</b>	10 - 110mm (3/8" - 4 1/3")	10 - 110mm (3/8" - 4 1/3")	10 - 110mm (3/8" - 4 1/3")	10 - 110mm (3/8" - 4 1/3")
<b>No. of Blade Spindles</b>	3	3	4	5
<b>Approx. Weight</b>	492kg (1085lbs)	543kg (1197lbs)	605kg (1334lbs)	707kg (1559lbs)
<b>Min PTO Output</b>	35hp	40hp	45hp	55hp



The ProCut is a great mower. I mow 19 schools at 40mm and the schools always comment on how nice the grounds look. I mow fast and the spread is great. I'd recommend Trimax to anyone!  
- ALLEN COE | Schools Contractor, NZ

### KEY APPLICATIONS.

✓ Municipal & Contractors ✓ School & Sports Fields ✓ Turf ✓ Golf & Country Clubs ✓ Lifestyle & Estates

### WHAT'S NEW ON PROCUT S5

Maintaining your mower has never been easier with all daily greasing requirements being removed with the implementation of the new Titan Roller Bearings. The new auto-belt tensioning system reduces belt maintenance and improves drive to the spindles for a cleaner, more consistent cut in heavy conditions.

★★★  
INDUSTRY LEADING WARRANTY

3 YEAR

INCLUDES SPINDLES & GEARBOXES  
EXPERIENCED SERVICE & SUPPORT NETWORK

### PRODUCT FEATURES.



**TITAN ROLLER BEARING SYSTEM**  
The Trimax Titan roller bearing system is maintenance-free, requiring no regular greasing, and provides excellent retention.



**AUTOMATIC BELT TENSIONING**  
Removes the need for belt adjustments and improves drive to the spindles and blades.



**LAZERBLADEZ™**  
Available in uplift and flat formation to suit mowing requirements, the unique tilt forward design minimises hang back in tough conditions.



**LOW MAINTENANCE**  
Zero daily maintenance. Spindles, roller bearings and auto-belt tensioning are maintenance-free.



**STEAFAST SEALED SPINDLES**  
We've eliminated the tedious task of regular greasing. Covered by our 3-year warranty, maintenance costs are reduced, and productivity is enhanced.



**BELT CAVITY DUAL WASH FLAPS**  
Provides easy access for removal of grass and drainage of water from belt chamber.



**PRECISE HEIGHT ADJUSTMENT**  
Clearly displayed indicators in both metric and imperial units and a high-tensile 2mm pitch adjuster for precise cut height alterations.



**FULL WIDTH ROLLERS**  
Full width rollers minimise scalping in undulating conditions and allow mowing over kerbsides and bunkers. Also aids in stripping.



**ACCURATE SPINDLE SETTING TECHNOLOGY**  
Spindle height is perfectly aligned providing the most accurate cut possible.



**STAND ON COVERS**  
Enables safe and easy access to the rear of the tractor when coupling the mower. Quick release latches allow easy removal for cleaning and servicing.

### \*OPTIONAL FEATURES.

- ✓ **ANTI-BOUNCE / WEAR SKIDS**  
Eliminates scalping and bouncing and reduces side channel wear.
- ✓ **ROLLER SCRAPERS**  
Cleans rollers and reduces clumping in wet conditions.
- ✓ **LIGHTING KIT WITH STORAGE BRACKET**  
LED road lights, safety triangle, and bracket for storage box.
- ✓ **STORAGE BOX**  
Easy access to spare parts and tools.
- ✓ **FRONT MOUNT**  
Convenient visibility. Only for tractors with front PTO drive.
- ✓ **SINGLE ROLLER**  
Allows greater grass intake at the front of the mower.
- ✓ **GALVANIZED SURFACE COATING**  
Protect against corrosion in harsh environments.
- ✓ **QUATTRO BLADES**  
Four blades (flat, upturned or mixed) per spindle for a finer cut.
- ✓ **NEXABLADES**  
Scientifically designed for high-end turf giving a superior cut and spread when it matters most.
- ✓ **ON CALL KIT**  
Each kit contains bearings blades and belts for a quick replacement in the field.

VIEW MORE PHOTOS, VIDEOS, AND INFORMATION ABOUT THE TRIMAX PROCUT SERIES 5 ONLINE HERE:





# TRIMAX PROCUT/S5 SR

**ENGINEERED TO TACKLE  
LONG GRASS APPLICATIONS IN  
THE TOUGHEST COMMERCIAL  
ENVIRONMENTS.**

## TRIMAX PROCUT/S5 SR

The original ProCut found phenomenal success in long grass applications due to its rigid construction, cut quality and manoeuvrability. With the ProCut S5 we have taken this to another level.

The Single Roller ProCut S5 is a long grass mower that provides a market leading cut and finish. Engineered with a low body profile and increased under deck clearance it provides excellent clipping distribution without any daily maintenance requirements.

Built with industry leading strength and durability, this is the machine you need for any commercial long grass applications.

**TALK TO US TODAY ABOUT THE  
CAPABILITIES OF PROCUT SERIES 5  
SR IN YOUR ENVIRONMENT.**

SPECIFICATIONS	178	210	237	290
Cutting Width	1.74m (5' 8 1/2")	2.06m (6' 9")	2.32m (7' 7")	2.89m (9' 6")
Overall Width	1.91m (6' 3")	2.22m (7' 3 1/2")	2.48m (8' 1 1/2")	3.05m (10' 1/2")
Overall Length	1.36m (4' 5")	1.43m (4' 8")	1.36m (4' 5")	1.36m (4' 5")
Height	1.08m (3' 6 1/2")	1.08m (3' 6 1/2")	1.08m (3' 6 1/2")	1.08m (3' 6 1/2")
Cut Height Range	10 - 110mm (3/8" - 4 1/3")	10 - 110mm (3/8" - 4 1/3")	10 - 110mm (3/8" - 4 1/3")	10 - 110mm (3/8" - 4 1/3")
No. of Blade Spindles	3	3	4	5
Approx. Weight	462kg (1019lbs)	509kg (1122lbs)	568kg (1252lbs)	663kg (1462lbs)
Min PTO Output	35hp	40hp	45hp	55hp

\*Minimum PTO output is a guide only. Requirement varies with the type of work and the terrain



*The ProCut is over and above what we ever expected. We knew we needed more than just a slasher, the fine cut and even dispersion of the ProCut leaves a fantastic presentation.*

**- DALE COOK** | Copelands Estate, Warragul, VIC, AUSTRALIA

### KEY APPLICATIONS.

✓ Horticulture ✓ Municipal & Contractors ✓ Aviation ✓ Racecourses ✓ Lifestyle & Estates

### WHAT'S NEW ON PROCUT/S5 SR

Maintaining your mower has never been easier with all daily greasing requirements being removed with the implementation of the new Titan Roller Bearings. The new auto-belt tensioning system reduces belt maintenance and improves drive to the spindles for a cleaner, more consistent cut in heavy conditions.

### \*\*\* INDUSTRY LEADING WARRANTY

**3  
YEAR**

INCLUDES SPINDLES  
& GEARBOXES  
EXPERIENCED SERVICE  
& SUPPORT NETWORK

### PRODUCT FEATURES.



**TITAN ROLLER BEARING SYSTEM**  
The Trimax Titan roller bearing system is maintenance-free, requiring no regular greasing, and provides excellent retention.



**AUTOMATIC BELT TENSIONING**  
Removes the need for belt adjustments and improves drive to the spindles and blades.



**LAZERBLADEZ™**  
Available in uplift and flat formation to suit mowing requirements, the unique tilt forward design minimises hang back in tough conditions.



**LOW MAINTENANCE**  
Zero daily maintenance. Spindles, roller bearings and auto-belt tensioning are maintenance-free.



**STEADFAST SEALED SPINDLES**  
We've eliminated the tedious task of regular greasing. Covered by our 3-year warranty, maintenance costs are reduced, and productivity is enhanced.



**BELT CAVITY DUAL WASH FLAPS**  
Provides easy access for removal of grass and drainage of water from belt chamber.



**PRECISE HEIGHT ADJUSTMENT**  
Clearly displayed indicators in both metric and imperial units and a high-tensile 2mm pitch adjuster for precise cut height alterations.



**FULL WIDTH ROLLER**  
Full width roller minimises scalping in undulating conditions and aids in striping.



**ACCURATE SPINDLE SETTING TECHNOLOGY**  
Spindle height is perfectly aligned providing the most accurate cut possible.



**STAND ON COVERS**  
Enables safe and easy access to the rear of the tractor when coupling the mower. Quick release latches allow easy removal for cleaning and servicing.

### \*OPTIONAL FEATURES.

- ✓ **REAR ROLLER SCRAPER**  
Cleans rollers and reduces clumping in wet conditions.
- ✓ **STORAGE & LIGHTING KIT**  
Mounts toolbox, LED road lights and safety triangle to mower.
- ✓ **GALVANIZED SURFACE COATING**  
Protect against corrosion in harsh environments.
- ✓ **ON CALL KIT**  
Each kit contains bearings blades and belts for a quick replacement in the field.
- ✓ **STORAGE BOX**  
Easy access to spare parts and tools.

**VIEW MORE PHOTOS, VIDEOS, AND INFORMATION  
ABOUT THE TRIMAX PROCUT SR ONLINE HERE:**





# TRIMAX PROCUT//S5 FM



**TAKES A Paddock  
TO HIGH LEVELS OF  
PRESENTATION.**

## TRIMAX PROCUT//S5 FM

The front mounted version of the ever-popular rear linkage mounted Trimax PROCUT.

The Trimax ProCut FM is a robust machine engineered to withstand everyday use in the toughest commercial environments yet will deliver a clean cut – every time. In operation, the front-mounted ProCut Series 5 rides on the ground on its front wheels and rear roller. The front castor wheels and rear roller follow ground contours allowing easy manoeuvrability and prevent scalping. With out-front mowing the need for the operator to look behind is reduced and the tractor wheels do not flatten the uncut grass.

**TALK TO US TODAY ABOUT THE  
CAPABILITIES OF PROCUT SERIES 5  
FM IN YOUR ENVIRONMENT.**



SPECIFICATIONS	178	210	237	290
Cutting Width	1.74m (5' 8 1/2")	2.06m (6' 9")	2.32m (7' 7")	2.89m (9' 6")
Overall Width	1.91m (6' 3")	2.22m (7' 3 1/2")	2.48m (8' 1 1/2")	3.05m (10' 1/2")
Overall Length	1.65m (5' 5")	1.72m (5' 8")	1.65m (5' 5")	1.65m (5' 1/2")
Height	1.08m (3' 6 1/2")	1.08m (3' 6 1/2")	1.08m (3' 6 1/2")	1.08m (3' 6 1/2")
Cut Height Range	10 - 110mm (3/8" - 4 1/3")	10 - 110mm (3/8" - 4 1/3")	10 - 110mm (3/8" - 4 1/3")	10 - 110mm (3/8" - 4 1/3")
No. of Blade Spindles	3	3	4	5
Approx. Weight	569kg (1254lbs)	616kg (1358lbs)	675kg (1488lbs)	770kg (1697lbs)
Min PTO Output	35hp	40hp	45hp	55hp

\*Minimum PTO output is a guide only. Requirement varies with the type of work and the terrain

### KEY APPLICATIONS.

- ✓ Municipal & Contractors
- ✓ School & Sport Fields
- ✓ Golf & Country Clubs
- ✓ Horticulture
- ✓ Aviation
- ✓ Racecourses

### WHAT'S NEW ON PROCUT//S5 FM

Maintaining your mower has never been easier with all daily greasing requirements being removed with the implementation of the new Titan Roller Bearings. The new auto-belt tensioning system reduces belt maintenance and improves drive to the spindles for a cleaner, more consistent cut in heavy conditions.

### PRODUCT FEATURES.



**TITAN ROLLER BEARING SYSTEM**  
The Trimax Titan roller bearing system is maintenance-free, requiring no regular greasing, and provides excellent retention.



**AUTOMATIC BELT TENSIONING**  
Removes the need for belt adjustments and improves drive to the spindles and blades.



**LAZERBLADEZ™**  
Available in uplift and flat formation to suit mowing requirements, the unique tilt forward design minimises hang back in tough conditions.



**LOW MAINTENANCE**  
Zero daily maintenance. Spindles, roller bearings and auto-belt tensioning are maintenance-free.



**STEADFAST SEALED SPINDLES**  
We've eliminated the tedious task of regular greasing. Covered by our 3-year warranty, maintenance costs are reduced, and productivity is enhanced.



**BELT CAVITY DUAL WASH FLAPS**  
Provides easy access for removal of grass and drainage of water from belt chamber.



**PRECISE HEIGHT ADJUSTMENT**  
Clearly displayed indicators in both metric and imperial units and a high-tensile 2mm pitch adjuster for precise cut height alterations.



**FULL WIDTH ROLLER**  
Full width roller minimises scalping in undulating conditions and aids in striping.



**ACCURATE SPINDLE SETTING TECHNOLOGY**  
Spindle height is perfectly aligned providing the most accurate cut possible.



**STAND ON COVERS**  
Enables safe and easy access to the rear of the tractor when coupling the mower. Quick release latches allow easy removal for cleaning and servicing.

### \*OPTIONAL FEATURES.

- ✓ **REAR MOUNT**  
Available in rear three-point linkage configuration with front and rear rollers for unmatched safety.
- ✓ **ROLLER SCRAPERS**  
Cleans rollers and reduces clumping in wet conditions.
- ✓ **QUATTRO BLADES**  
Four blades (flat, upturned or mixed) per spindle for a finer cut.
- ✓ **NEXABLADES**  
Scientifically designed for high-end turf giving a superior cut and spread when it matters most.
- ✓ **ON CALL KIT**  
Each kit contains bearings blades and belts for a quick replacement in the field.

**VIEW MORE PHOTOS, VIDEOS, AND INFORMATION  
ABOUT THE TRIMAX PROCUT FM ONLINE HERE:**





# TRIMAX TOPPER/S3



## TRIMAX TOPPER/S3

The Trimax TOPPER cuts pasture quickly and efficiently and has multiple features enabling its use on lower hp tractors.

Developed on a Waikato dairy farm in 1993, the Topper uses small diameter blades turning at high speed resulting in more cuts per forward metre than comparable pasture toppers, giving a finer cut and increasing regrowth and pasture quality. The high under-body clearance and open deck design allows good flow of grass into the mowing deck and a clean ejection of cut grass.

Powered by a proven belt drive system that now has auto belt tensioners, the Trimax Topper is more efficient than comparable shaft drive pasture toppers. Short in body from front to rear and mounting close to the tractor, the Topper is able to be used on smaller tractors for large cut widths and also enables a smaller turning radius for easier access into tight corners.

**TALK TO US TODAY ABOUT THE CAPABILITIES OF TOPPER SERIES 3 IN YOUR ENVIRONMENT.**



SPECIFICATIONS	237	282
Cutting Width	2.32m	2.74m
Overall Width	2.48m	2.91m
Overall Length	1.32m	1.39m
Height	0.99m	0.99m
Cut Height Range	20 - 160mm	20 - 160mm
No. of Blade Spindles	4	4
Approx. Weight	643kg	685kg
Min PTO Output	37hp	45hp

\*Minimum PTO Output is a guide only. Requirement varies with the type of work and the terrain.



*We use the Topper to keep up the quality of the grass behind the cows. The farm tends to grow a lot of grass early on in the season and it's hard to control, even with silage, so we top to keep the quality up. We get a nice clean cut which means you get good regrowth. I wouldn't buy anything else.*

- IAN WILCOX | Farmer, Matamata, NZ

### KEY APPLICATIONS.

✓ Dairy Farms ✓ Agriculture ✓ Aviation ✓ Racecourses

### WHAT'S NEW ON TOPPER

The Topper is now fitted with an automatic belt tensioning system improving its performance in heavy conditions. Stand on covers bring added durability whilst providing safe and easy access to the rear of a tractor when coupling.

### THE BENEFITS OF PASTURE TOPPING.

✓ Improves feed quality ✓ Increases farm profitability ✓ Increases MS production ✓ Promotes faster re-growth



### PRODUCT FEATURES.



#### EASIER MAINTENANCE

New latch system provides easier access to drive system and access to roller bearing grease nipple has been improved.



#### AUTOMATIC BELT TENSIONER

Eliminates the need for belt adjustments and improves drive to the spindles and blades in longer grass.



#### STAND ON BELT COVERS

Provides safe and easy access to the rear of tractor when coupling.



#### ACCURATE HEIGHT SYSTEM

Height indicators are clearly displayed allowing for accurate and easy in field height adjustments



#### LOW HP REQUIREMENTS

Open deck design for grass processing, efficient belt drive system and a short mower front to rear allows for use on lower HP tractors.



#### LAZERBLADEZ™

Available in uplift and flat formation to suit mowing requirements, the unique tilt forward design minimises hang back in tough conditions.



#### ADVANCED DESIGN

Short front to rear and mounting close to the tractor allowing better manoeuvrability. High under body clearance and open deck design for increased grass production.




#### REAR ROLLER

The Topper is fitted with a rear roller, which ensures that in undulating environments you'll have increased protection from scalping.



#### ANTI-BLOCK SYSTEM

High tensile spindles feature anti-wrap pins preventing frustrating blockages around spindles in extreme conditions.



#### IMPROVES FEED QUALITY

Topping controls poor quality pasture components such as seed-heads and thistles and prevents their reoccurrence.



#### HIGH SPINDLE SPEEDS

More spindles, higher spindle speeds and shorter blade beams yield more cuts per forward meter of travel resulting in clean cut pasture.

**VIEW MORE PHOTOS, VIDEOS, AND INFORMATION ABOUT THE TRIMAX TOPPER SERIES 3 ONLINE HERE:**





# TRIMAX FURY



EXCEPTIONAL  
TOUGHNESS,  
LOW MAINTENANCE  
BRILLIANCE.

## TRIMAX FURY

The Fury is our latest offering to the Horticulture market, a commercially built gear driven rotary mower which delivers market leading cut quality and reliability in tough, long grass conditions.

With over 40 years of experience in Horticulture, the Trimax Fury draws on years of customer insights and design experience to provide the ultimate gear driven rotary mower for the horticulture industry.

With the ability to provide rear or side discharge, and a range of roller or castor options, the Fury is one of our most adaptable mowers, allowing you to choose how you maintain your orchard.

The Fury incorporates Trimax's low maintenance design philosophy with our fully sealed Titan roller bearing and our unique coupling design which allows coupling's to be replaced easily without needing to remove gearboxes.

Backed by industry leading support and service, the Fury is the machine you need for inter-row orchard and vineyard management.

TALK TO US TODAY ABOUT THE CAPABILITIES  
OF FURY IN YOUR ENVIRONMENT.

			
SPECIFICATIONS	160	180	200
Cutting Width	1.6m (5'3")	1.8m (5' 10 7/8")	2m (6' 6 11/16")
Overall Width	1.72m (5' 7 11/16")	1.92m (6' 3 5/8")	2.12m (6' 11 1/2")
Overall Length	1.71m (5' 7 5/16")	1.81m (5' 11 5/16")	1.91m (6' 3 3/4")
Height	1.15m (3' 9 3/8")	1.15m (3' 9 3/8")	1.15m (3' 9 3/8")
Cut Height Range	20 - 100mm (3/4 - 4")	20 - 100mm (3/4 - 4")	20 - 100mm (3/4 - 4")
No. of Rotors	2	2	2
Approx. Weight	610kg (1345lbs)	658kg (1450lbs)	733kg (1616lbs)
Min PTO Output	50hp	60hp	65hp

\*Minimum PTO output is a guide only. Requirement varies with the type of work and the terrain

### KEY APPLICATIONS.

✓ Horticulture ✓ Viticulture

### \*\*\* INDUSTRY LEADING WARRANTY

3  
YEAR

2 YEAR WARRANTY  
FOR GEARBOXES  
EXPERIENCED SERVICE  
& SUPPORT NETWORK



### PRODUCT FEATURES.



**TITAN ROLLER BEARING SYSTEM**  
The Trimax Titan roller bearing system is maintenance-free and requires no greasing.



**LOW MAINTENANCE**  
Zero daily maintenance requirements with the inclusion of the Titan roller bearing. Focus more on mowing and less on maintenance.



**DURABLE DESIGN**  
A 10mm body reinforced with 10mm stiffeners around the gearbox mountings.



**DISCHARGE VERSATILITY**  
Side and rear discharge options are available to suit mowing requirements.



**UNIQUE COUPLING ASSEMBLY**  
Our unique coupling assembly means the rubber coupling can be easily replaced without having to remove gearboxes.



**ENDURABLADES**  
Endurablades are a heavy-duty blade with significant uplift, resulting in a clean cut in long grass conditions.



**OVERRUN SLIP CLUTCH**  
Slip clutch comes standard to provide additional protection to the drive system in heavy conditions.



**ANTI-BLOCK SYSTEM**  
Antiwrap pins are included to prevent material becoming wrapped in the driveline.

### \*OPTIONAL FEATURES.

✓ **HEAVY DUTY BODY**  
A 15mm body reinforced with 10mm stiffeners around the gearbox mountings.  
✓ **HEAVY DUTY ROLLERS**  
Increases wall thickness from 6mm to 13mm for tough conditions.  
✓ **REAR CASTOR WHEELS**  
Rear castors are available to suit terrain and soil conditions.  
✓ **ROLLER SCRAPERS**  
Cleans rollers and reduces clumping in wet conditions.

VIEW MORE PHOTOS, VIDEOS, AND INFORMATION  
ABOUT THE TRIMAX FURY ONLINE HERE:





# TRIMAX STEALTH/S3



**MARKET LEADING  
CUT, FINISH AND  
VERSATILITY.**

## TRIMAX STEALTH/S3

The STEALTH SERIES 3 has been designed to give a higher quality of cut, operate in a wider range of conditions, be safer, more robust, easier to operate and take less time to maintain than any previous STEALTH.

Backed by 30 years' of experience in market, the concept of Stealth Series 3 was born from the demand of our Australian customers for a mower that was more versatile in terms of long grass performance and more user friendly for both the operator and the workshop.

Backed by our industry leading 3-year warranty and our parts and technical support team, we know the Stealth Series 3 to be the best linkage wing mower for passive and active turf in the market.

**TALK TO US TODAY ABOUT THE  
CAPABILITIES OF STEALTH SERIES 3  
IN YOUR ENVIRONMENT.**



### SPECIFICATIONS

**340**

Cutting Width	3.4m (11' 2")
Overall Width	3.55m (11' 8")
Transport Width	2.42m (7' 11")
Overall Length	1.63m (5' 4")
Height (wings up)	1.21m (3' 11½")
Cut Height Range	10 - 90mm (¾" - 3½")
No. of Blade Spindles	5
Approx. Weight	940kg (2070lbs)
Min PTO Output	70hp

\*Minimum PTO output is a guide only. Requirement varies with the type of work and the terrain



*"The Stealth has brilliant decks with excellent grass dispersion and minimal greasing required. We can just jump in and cut grass!"*

**- ROSS HAMNER** | Downer, Auckland, NZ

### KEY APPLICATIONS.

✓ Municipal & Contractors ✓ School & Sports Fields ✓ Racecourses ✓ Aviation ✓ Lifestyle & Estates

### WHAT'S NEW ON STEALTH/S3

We've reduced the need for greasing through the introduction of new features such as SteadFast maintenance-free spindles and composite maintenance-free bushes. Stealth wing locks can now be operated from inside the tractor cab. Modifications have been made to the cutting chamber and the baffle design for improved cut quality and easy cleaning.

### PRODUCT FEATURES.



#### LOC TEK

A stubless roller bearing system for vastly improved roller retention, alignment, bearing life and minimal maintenance.



#### LOW MAINTENANCE

Reduced greasing requirements mean operators can spend more time mowing and less on maintenance.



#### LAZERBLADEZ™

Available in up-lift and flat formation to suit mowing requirements, the unique tilt forward design minimises hang back in tough conditions.



#### GREATER MOWING VERSATILITY

The improved cutting chamber and baffle design directs airflow from the blades out and over the rear roller for a better cut and spread.



#### EASY TO CLEAN

The improved belt chamber design results in easy cleaning, with the front openings allowing any grass to be easily washed out or removed.




#### EASY HEIGHT ADJUSTMENT

Clearly displayed stainless steel height indicators allow the easy adjustment of cut heights without having to raise or lower the wings and deck.



#### ANTI-WEAR SKIDS

Anti-wear skids reduce wear on side channels when operating in rough or uneven terrain.



#### STAND ON COVERS

Enables safe and easy access to the rear of the tractor when coupling to the mower. Quick release latches allow easy removal for cleaning and servicing.

### \*OPTIONAL FEATURES.

#### ✓ ROLLER SCRAPERS

Cleans rollers and reduces clumping in wet conditions.

#### ✓ QUATTRO BLADES

Four blades (flat, upturned or mixed) per spindle for a finer cut.

#### ✓ SERVICE STANDS

Lockable stands for safe underside access.

#### ✓ LIGHTING KIT WITH STORAGE BRACKET

LED road lights, safety triangle, and bracket for storage box.

#### ✓ STORAGE BOX

Easy access to spare parts and tools.

#### ✓ GALVANIZED SURFACE COATING

Protect against corrosion in harsh environments.

#### ✓ ELECTRIC UNLOCK

Upgrade to electric actuation for the mower wings' transport lock.

**VIEW MORE PHOTOS, VIDEOS, AND INFORMATION  
ABOUT THE TRIMAX STEALTH SERIES 3 ONLINE HERE:**





# TRIMAX STEALTH/S3 SR

**PURPOSE BUILT FOR  
ROADSIDE, OPEN SPACE  
AND LONG GRASS  
APPLICATIONS.**

## TRIMAX STEALTH/S3 SR

The Trimax STEALTH SR combines the cut quality, safety, robustness, decreased maintenance time, and easy operation of STEALTH SERIES 3 with enhanced performance in long grass.

With even more versatility than the Stealth Series 3 for long grass applications, the Stealth SR is purpose-built for an excellent cut for grass up to 500mm. The cutting chamber and baffle design are optimised to provide a better finish and spread at higher cut heights.

New and improved design features make the Stealth SR safer, more operator friendly, and easier to maintain than ever.

**TALK TO US TODAY ABOUT THE  
CAPABILITIES OF STEALTH S3 SR  
IN YOUR ENVIRONMENT.**



### SPECIFICATIONS

**340**

Cutting Width	3.4m (11' 2")
Overall Width	3.55m (11' 8")
Transport Width	2.42m (7' 11")
Overall Length	1.63m (5' 4")
Height (wings up)	1.21m (3' 11½")
Cut Height Range	40 - 90mm (1½" - 3½")
No. of Blade Spindles	5
Approx. Weight	900kg (1984lbs)
Min PTO Output	60hp

\*Minimum PTO output is a guide only. Requirement varies with the type of work and the terrain

### KEY APPLICATIONS.

- ✓ Passive Turf & Open Space
- ✓ Municipal & Contractors
- ✓ Racecourses
- ✓ Aviation
- ✓ Horticulture
- ✓ Lifestyle & Estates

### WHAT'S NEW ON STEALTH/S3 SR


The Stealth SR incorporates all the new features of the Stealth S3. An anti-scalp roller on the front of the main mowing deck and bubble rollers on the wings are added to protect against scalping over contours.

### INDUSTRY LEADING WARRANTY

**3  
YEAR**

INCLUDES SPINDLES  
& GEARBOXES  
EXPERIENCED SERVICE  
& SUPPORT NETWORK

### PRODUCT FEATURES.



#### LOCTEK

A stubless roller bearing system for vastly improved roller retention, alignment, bearing life and minimal maintenance.



#### LONG GRASS PERFORMANCE

Designed to mow grass up to 500mm high and achieve the quality cut you expect from Trimax.



#### LAZERBLADEZ™

Available in up-lift and flat formation to suit mowing requirements, the unique tilt forward design minimises hang back in tough conditions.




#### ANTI-SCALP ROLLER

A raised front roller provides anti-scalp protection for your turf without impacting long grass performance.



#### EASY TO CLEAN

The improved belt chamber design results in easy cleaning, with the front openings allowing any grass to be easily washed out or removed.



#### EASY HEIGHT ADJUSTMENT

Clearly displayed stainless steel height indicators allow the easy adjustment of cut heights without having to raise or lower the wings and deck.




#### IN-CAB UNLOCK SYSTEM

Unlock the mower wings' transport lock from the convenience of the tractor seat using the tractor's hydraulic control lever.



#### LOW MAINTENANCE

Reduced greasing requirements mean operators can spend more time mowing and less on maintenance.



#### STAND ON COVERS

Enables safe and easy access to the rear of the tractor when coupling to the mower. Quick release latches allow easy removal for cleaning and servicing.

### \*OPTIONAL FEATURES.

#### ✓ ROLLER SCRAPERS

Cleans rollers and reduces clumping in wet conditions.

#### ✓ SERVICE STANDS

Lockable stands for safe underside access.

#### ✓ LIGHTING KIT WITH STORAGE BRACKET

LED road lights, safety triangle, and bracket for storage box.

#### ✓ STORAGE BOX

Easy access to spare parts and tools.

#### ✓ GALVANIZED SURFACE COATING

Protect against corrosion in harsh environments.

#### ✓ ELECTRIC UNLOCK

Upgrade to electric actuation for the mower wings' transport lock.

**VIEW MORE PHOTOS, VIDEOS, AND INFORMATION  
ABOUT THE TRIMAX STEALTH SR ONLINE HERE:**





# TRIMAX SNAKE//S3

THE TURF SPECIALIST'S  
SECRET WEAPON.

## TRIMAX SNAKE//S3

The Trimax Snake sets the standard for trailed rotary mowing, trusted by many prestigious golf courses and turf farms worldwide.

Studied by the Sports Turf Institute of New Zealand, the Trimax cutting system delivers cut quality comparable to cylinder mowers, while offering the versatility and reliability of Trimax's renowned rotary design.

Now, with zero daily maintenance, the Snake S3 makes operations even more efficient for turf professionals. The Snake S3 features the Titan roller bearing system and maintenance-free wheel hubs, which together eliminate the need for daily greasing. These innovations further reduce the cost of ownership allowing owners and operators to focus on what matters most – mowing.


Backed by Trimax's industry-leading 3-year warranty, the Snake S3 redefines productivity and operational efficiency.

TALK TO US TODAY ABOUT THE CAPABILITIES  
OF SNAKE SERIES 3 IN YOUR ENVIRONMENT.



SPECIFICATIONS	320	400
Cutting Width	3.20m (10' 7")	4.00m (13' 1")
Overall Width	3.36m (11' 1")	4.12m (13' 6")
Overall Length	3.60m (11' 10")	3.60m (11' 10")
Transport Width	2.14m (7' 1/4")	2.14m (7' 1/4")
Transport Height	1.86m (6' 1")	2.24m (7' 4")
Cut Height Range	10 - 100mm (3/8" - 4")	10 - 100mm (3/8" - 4")
No. of Blade Spindles	9	11
Approx. Weight	1350kg (2976lbs)	1480kg (3258lbs)
Min PTO Output	35hp	45hp

\*Minimum PTO output is a guide only. Requirement varies with the type of work and the terrain



It's one of my favourite mowers. Maintenance is an absolute breeze and the service from Trimax has been brilliant. I would recommend this mower to any country club or golf course.

- SIMON ASKEY Head Green Keeper, Whangamata Golf Club

### KEY APPLICATIONS.

- ✓ Golf Courses (Roughs & Fairways)
- ✓ Municipal & Contractors
- ✓ Turf
- ✓ School & Sports Fields
- ✓ Lifestyle & Estates

### WHAT'S NEW ON SNAKE S3

The Snake S3 builds on the Snake legacy with Trimax Titan roller bearings and maintenance-free wheel hubs for zero daily maintenance. New features also include height adjustment collars, stand-on covers, and removable blade beams for easy operation—letting turf professionals focus on exceptional results.

### PRODUCT FEATURES.



#### TITAN ROLLER BEARING SYSTEM

The Trimax Titan roller bearing system is maintenance-free, requiring no regular greasing, and provides excellent retention.



#### ARTICULATION ABILITY

With three articulating decks the Snake has the ability to provide a consistent cut when contours are present.



#### ZERO TURN

Allows continuous cutting while turning sharply for maximum productivity.




#### ZERO DAILY MAINTENANCE

Implementation of the Trimax Titan roller bearing system and maintenance-free wheel hubs results in no daily maintenance.



#### FULL WIDTH ROLLERS

Full width rollers minimise scalping in undulating conditions, allowing for mowing over kerbsides and bunkers, while leaving a premium striped finish.



#### EASE OF USE

The Snake's compact design allows easy towing, new collars simplify height adjustment, and removable blade beams ensure easy blade changes.



#### AUTOMATIC BELT TENSIONERS

Automatic belt tensioners eliminate the need for belt adjustments and provides consistent drive to the spindles and blades.



#### QUIKLIFT

QuikLIFT enables decks to be raised slightly for traversing paths without the need to disengage the PTO.



#### LAZERBLADEZ™

LazerBladez offer a superior finish with a cost-efficient design, as only the fling-tip needs replacing. Available in uplift and flat formations, their tilt-forward design minimizes hang-back in tough conditions.

### \*OPTIONAL FEATURES.

#### ✓ ANTI-BOUNCE / WEAR SKIDS

Eliminates scalping and bouncing and reduces side channel wear.

#### ✓ ROAD RATED TYRES

Tow at highway speeds on the road.

#### ✓ ROLLER SCRAPERS

Cleans rollers and reduces clumping in wet conditions.

#### ✓ ELECTRIC UNLOCK

Unlocks decks electronically from the tractor seat.

#### ✓ MUDGUARDS, LIGHTS, & CHAINS

Add LED tail light clusters, safety chains, and transport wheel mudguards for increased safety during road transportation.

#### ✓ MULCH KIT

Save on purchasing dedicated leaf blowing and collection units with the Snake Mulch Kit.

#### ✓ NEXABLADES

Scientifically designed for high-end turf giving a superior cut and spread when it matters most.

#### ✓ MULTI LIFT SYSTEM

Five different lift functions to adjust mowing widths when required.

#### ✓ TRIMAX CONNECT

A free app available when Trimax Multi-Lift System (MLS) is fitted. Provides mower runtime analysis and controls MLS functionality.

VIEW MORE PHOTOS, VIDEOS, AND INFORMATION  
ABOUT THE TRIMAX SNAKE SERIES 3 ONLINE HERE:





# TRIMAX PEGASUS//S5



**STRONGER.  
SMARTER.  
SAFER.  
SECOND TO NONE.**

## TRIMAX PEGASUS//S5

The Trimax Pegasus sets the benchmark in wide area mowing for parks, reserves, airports, racecourses, sports fields, turf farms, and more.

For over 20 years, the Trimax Pegasus has been leading the way in wide-area mowing. Introduced in 2001 as the world's first multi-deck roller mower, the Pegasus is renowned for its robustness and versatility. Its fast spindle speeds and deep mowing decks deliver the highest quality cut and finish every time, and articulating decks provide a consistent cut over light to moderate contours.

The Pegasus S5 builds on the incredible strength, durability, versatility, and efficiency of the previous series to increase machine life and decrease downtime in full-time commercial applications.

**TALK TO US TODAY ABOUT THE CAPABILITIES OF TRIMAX PEGASUS S5 IN YOUR ENVIRONMENT.**



SPECIFICATIONS	493	610	722
Cutting Width	4.94m (16' 2")	6.09m (19' 11")	7.23m (23' 9")
Overall Width	5.1m (16' 9")	6.25m (20' 6")	7.39m (24' 3")
Overall Length	4.65m (15' 3")	4.65m (15' 3")	4.65m (15' 3")
Transport Width	2.53m (8' 3 3/4")	2.53m (8' 3 3/4")	2.53m (8' 3 3/4")
Transport Height	2.62m (8' 7")	3.2m (10' 6")	3.8m (12' 6")
Cut Height Range	10 - 110mm (3/8" - 4 1/2")	10 - 110mm (3/8" - 4 1/2")	10 - 110mm (3/8" - 4 1/2")
No. of Blade Spindles	9	11	13
Approx. Weight	2200kg (4895lbs)	2440kg (5380lbs)	2660kg (5865lbs)
Min PTO Output	50hp	55hp	60hp

\*Minimum PTO output is a guide only. Requirement varies with the type of work and the terrain

### KEY APPLICATIONS.

✓ Municipal & Contractors ✓ Turf ✓ Racecourses ✓ Polo ✓ School & Sport Fields

### WHAT'S NEW ON PEGASUS//S5

The Pegasus chassis and outrigger arms have been completely redesigned to increase strength without adding unnecessary weight. Larger wheels decrease ground pressure and support a wider range of tyre options. Maintenance-free features have been introduced.

### PRODUCT FEATURES.



**ROBUST CHASSIS**  
10% stronger under tough travel conditions, twice the durability in deck lifting and lowering, and a 60% increase in rigidity in the outrigger arms from Pegasus S4.



**IMPACT PROTECTION**  
Outrigger arms and side channel leading edges have been redesigned for increased impact protection.



**SUSPENSION**  
The new Pegasus S5 Flexiride Torque Suspension System is designed for increased strength and smoother travel at highway speeds.



**LOW MAINTENANCE**  
Zero daily greasing for an 80% reduction in annual grease consumption. Spindles, roller bearings, and auto-belt tensioning are maintenance-free.



**QUIKLIFT**  
Enables mower decks to be raised without disengaging the PTO to traverse driveways, footpaths and pavements. Now a standard inclusion for all Pegasus models.



**HEIGHT ADJUSTMENT**  
Clearly displayed indicators in both metric and imperial units and a high-tensile 2mm pitch adjuster for precise cut height alterations.



**TITAN ROLLER BEARING SYSTEM**  
The Trimax Titan roller bearing system is maintenance-free, requiring no regular greasing, and provides excellent retention.



**SAFETY COMPLIANT**  
Complies with international safety standards and can be used with confidence on the roads and in public spaces.



**STAND ON BELT COVERS**  
Provides safe and easy access to the chassis.

### \*OPTIONAL FEATURES.

- ✓ **ANTI-BOUNCE / WEAR SKIDS**  
Eliminates scalping and bouncing and reduces side channel wear.
- ✓ **ROLLER SCRAPERS**  
Cleans rollers and reduces clumping in wet conditions.
- ✓ **QUATTRO BLADE SYSTEM**  
Four blades (flat, upturned or mixed) per spindle for a finer cut.
- ✓ **ELECTRIC UNLOCK**  
Unlocks decks electronically from the tractor seat.
- ✓ **MULTI-LIFT SYSTEM**  
Five different lift functions for mower decks. Now with Drive Protect.
- ✓ **TURF TYRES**  
Distributes mower weight for less ground disturbance.
- ✓ **SPARE ROAD TYRE & MOUNT**  
Mounts a spare wheel to the rear mowing deck.
- ✓ **STORAGE KIT**  
Mounts a toolbox to the mower chassis.
- ✓ **GALVANIZED**  
Protect against corrosion in harsh environments.
- ✓ **ELECTRIC BRAKES WITH BREAKAWAY**  
Reduces braking force required by the tractor.
- ✓ **ROAD KIT**  
Adds lights, signage, and beacons to the mower.
- ✓ **TURF MUDGUARDS**  
Available for both road tyres and turf tyres.
- ✓ **NEXABLADES**  
Scientifically designed for high-end turf giving a superior cut and spread when it matters most.

**VIEW MORE PHOTOS, VIDEOS, AND INFORMATION ABOUT THE TRIMAX PEGASUS SERIES 5 ONLINE HERE:**





# TRIMAX PEGASUS S5 SR



**WIDE AREA,  
OPTIMAL LONG  
GRASS PERFORMANCE.**

## TRIMAX PEGASUS S5 SR

Since its introduction in 2001, the Trimax Pegasus series has established itself as the benchmark in wide-area mowing where cut quality and presentation are key. The Pegasus SR builds on the Pegasus's legendary versatility and cut quality by taking its long grass performance to another level.

The Pegasus SR variant allows larger volumes of grass to enter the deck by replacing the front roller with castor wheels, allowing the mower to tackle long grass more effectively.

Containing all the industry leading features included with the Pegasus S5, the Pegasus SR has a range of features that increase machine life, reduce maintenance, and decrease downtime in full-time commercial applications.

Built with industry leading strength and durability, the Pegasus SR is the machine you need for any commercial wide area long grass applications.

**TALK TO US TODAY ABOUT THE  
CAPABILITIES OF TRIMAX PEGASUS S5 SR  
IN YOUR ENVIRONMENT.**

	493	610	722
<b>SPECIFICATIONS</b>			
<b>Cutting Width</b>	4.94m (16' 2")	6.09m (19' 11")	7.23m (23' 9")
<b>Overall Width</b>	5.1m (16' 9")	6.25m (20' 6")	7.39m (24' 3")
<b>Overall Length</b>	4.65m (15' 3")	4.65m (15' 3")	4.65m (15' 3")
<b>Transport Width</b>	2.53m (8' 3¾")	2.53m (8' 3¾")	2.53m (8' 3¾")
<b>Transport Height</b>	2.62m (8' 7")	3.2m (10' 6")	3.8m (12' 6")
<b>Cut Height Range</b>	20 - 180mm (¾" - 7½")	20 - 180mm (¾" - 7½")	20 - 180mm (¾" - 7½")
<b>No. of Blade Spindles</b>	9	11	13
<b>Approx. Weight</b>	2300kg (5071lbs)	2500kg (5512lbs)	2700kg (5952lbs)
<b>Min PTO Output</b>	50hp	55hp	60hp

\*Minimum PTO output is a guide only. Requirement varies with the type of work and the terrain

### KEY APPLICATIONS.

✓ Passive Turf & Open Space ✓ Municipal & Contractors ✓ Aviation ✓ Racecourses

### INDUSTRY LEADING WARRANTY

**3**  
YEAR  
INCLUDES SPINDLES  
& GEARBOXES  
EXPERIENCED SERVICE  
& SUPPORT NETWORK

### PRODUCT FEATURES.



#### LONG GRASS PERFORMANCE

Designed to mow grass up to 500mm high (depending on conditions) with a cut height range of 20 - 180mm.



#### SINGLE ROLLER

Replacing the front roller with castor wheels allows more grass into the cutting chamber, resulting in a clean cut in long grass.



#### TITAN ROLLER BEARING SYSTEM

The Trimax Titan roller bearing system is maintenance-free, requiring no regular greasing, and provides excellent retention.



#### AUTOMATIC BELT TENSIONING

Provides more drive to the spindles in long grass applications.



#### IMPACT PROTECTION

Outrigger arms and side channel leading edges have been redesigned for increased impact protection.



#### QUIKLIFT

Enables mower decks to be raised without disengaging the PTO to traverse driveways, footpaths and pavements. Now a standard inclusion for all Pegasus models.



#### SAFETY COMPLIANT

Complies with international safety standards and can be used with confidence on the roads and in public spaces.



#### ROBUST CHASSIS

10% stronger under tough travel conditions, twice the durability in deck lifting and lowering, and a 60% increase in rigidity in the outrigger arms from Pegasus S4.



#### LOW MAINTENANCE

Zero daily greasing for an 80% reduction in annual grease consumption. Spindles, roller bearings, and auto-belt tensioning are maintenance-free.



#### SUSPENSION

The new Pegasus S5 Flexiride Torque Suspension System is designed for increased strength and smoother travel at highway speeds.

### \*OPTIONAL FEATURES.

#### ✓ REAR ROLLER SCRAPER

Cleans rollers and reduces clumping in wet conditions.

#### ✓ QUATTRO BLADE SYSTEM

Four blades (flat, upturned or mixed) per spindle for a finer cut.

#### ✓ ELECTRIC UNLOCK

Unlocks decks electronically from the tractor seat.

#### ✓ TURF TYRES

Distributes mower weight for less ground disturbance.

#### ✓ SPARE ROAD TYRE & MOUNT

Mounts a spare wheel to the rear mowing deck.

#### ✓ STORAGE KIT

Mounts a toolbox to the mower chassis.

#### ✓ ELECTRIC BRAKES WITH BREAKAWAY

Reduces braking force required by the tractor.

#### ✓ ROAD KIT

Adds lights, signage, and beacons to the mower.

#### ✓ TURF MUDGUARDS

Available with turf tyre option.

**VIEW MORE PHOTOS, VIDEOS, AND INFORMATION  
ABOUT THE TRIMAX PEGASUS SERIES 5 ONLINE HERE:**





# TRIMAX X-WAM/S5



THE KING OF WIDE  
AREA MOWING.

## TRIMAX X-WAM/S5

The X-WAM S5 is Trimax's largest mower, purpose-built for wide area turf management. With a 11.5m cutting width, 1.2m larger than its predecessor, productivity is increased by 11%, saving time and lowering operational costs.

Front and rear rollers follow contours, providing excellent anti-scalp protection, while leaving a premium striped finish. Maintenance-free spindles and roller bearings result in zero daily maintenance requirements.

Built on a fully integrated chassis, the X-WAM S5 is 50% stronger than its predecessor, increasing machine life in the toughest conditions. QuikLift is now included, reducing the risk of headland damage whilst turning. Its compact transportation design allows for safe and easy relocation between fields whilst its variable cutting width allows you to change mow widths when needed.

Backed by Trimax's industry leading 3 year warranty, the X-WAM S5 is the ultimate solution for wide area turf management.

TALK TO US TODAY ABOUT THE CAPABILITIES  
OF X-WAM SERIES 5 IN YOUR ENVIRONMENT.



SPECIFICATIONS	1150
Cutting Width	11.5m (37' 7")
Overall Width	11.65m (38' 3")
Overall Length	6.64m (21' 9")
Transport Width	2.96m (9' 8 1/2")
Transport Height	4.1m (13' 5")
Cut Height Range	10 - 110mm (3/8" - 4 1/2")
No. of Blade Spindles	21
Approx. Weight	5,780kg (12,740lbs)
Min PTO Output	90 hp

\*Minimum PTO output is a guide only.  
Requirement varies with the type of work and the terrain



Trimax X-WAM is great equipment. It replaced one tractor, one employee and reduced mowing time. Less equipment to maintain and less equipment expense has increased our profitability.  
- LYNN GIBB | Hope Plantation Turf, Texas USA

### KEY APPLICATIONS.

✓ Turf / Sod Farm

### WHAT'S NEW ON X-WAM/S5

The new X-Wam is 1.2m larger than the previous model. The deck design has been brought in line with the Pegasus S5, providing a range of maintenance and quality improvements. With QuikLift now standard, it is the most maneuverable wide area mower in its class.

\*\*\*  
**INDUSTRY LEADING  
WARRANTY**

3  
YEAR

INCLUDES SPINDLES  
& GEARBOXES  
EXPERIENCED SERVICE  
& SUPPORT NETWORK

### PRODUCT FEATURES.



**FULL WIDTH ROLLERS**  
Front and rear rollers follow contours, providing excellent anti-scalp protection, while leaving a premium striped finish.



**AUTOMATIC BELT TENSIONING**  
Automatic belt tensioners eliminate the need for belt adjustments and provides consistent drive to the spindles and blades.



**ZERO DAILY MAINTENANCE**  
Zero daily maintenance. Spindles and Titan roller bearings are maintenance-free.



**FULLY INTEGRATED CHASSIS**  
The X-WAM has a purpose built fully integrated chassis which has increased durability by 50% compared to the previous model.



**VARIABLE CUTTING WIDTH**  
With a variable cutting width between 7.2m and 11.5m you can adjust your mow widths quickly when required.



**QUIKLIFT**  
Enables mower decks to be raised without disengaging the PTO to reduce turf damage when turning.



**ULTIMATE CONTOUR FOLLOWING**  
The X-Wam S5 features multiple small, robust decks for superior cut quality in undulating conditions.



**EASE OF USE**  
Stand-on covers, hydraulic parking jack, and electric unlock simplify operation.



**WHEELS RUN ON CUT GRASS**  
The rear deck is located between the transport wheels, so the grass is not flattened prior to mowing.



**TURF TYRE**  
The chassis tyres are 15% wider than the previous model distributing weight evenly across the turf.

### \*OPTIONAL FEATURES.

- ✓ **GALVANIZED SURFACE COATING**  
Protects against corrosion in harsh conditions.
- ✓ **QUATTRO BLADES**  
Four blades (flat, upturned or mixed) per spindle for a finer cut.
- ✓ **NEXABLADES**  
Scientifically designed for high-end turf giving a superior cut and spread when it matters most.
- ✓ **ANTI-BOUNCE / WEAR SKIDS**  
Eliminates scalping and bouncing and reduces side channel wear.
- ✓ **ROLLER SCRAPERS**  
Cleans rollers and reduces clumping in wet conditions.
- ✓ **ON-CALL KIT**  
Each kit contains blades and belts for a quick replacement in the field.

VIEW MORE PHOTOS, VIDEOS, AND INFORMATION  
ABOUT THE TRIMAX X-WAM ONLINE HERE:





TRIMAX  
X-WAM/S5 ZR



THE KING OF WIDE  
AREA MOWING.

TRIMAX  
X-WAM/S5 ZR

The X-WAM S5 Zero Roller (ZR) is Trimax's largest mower, purpose-built for wide area turf management. With a 11.5m cutting width, 1.2m larger than its predecessor, productivity is increased by 11%, saving time and lowering operational costs.

Mowing decks travel on front and rear castors, allowing long grass to be cut without being rolled first, perfect for delicate grasses and regular maintenance mowing. Maintenance-free spindles and castor wheels result in zero daily maintenance requirements.

Built on a fully integrated chassis, the X-WAM S5 ZR is 50% stronger than its predecessor, increasing machine life in the toughest conditions. QuikLift is now included, reducing the risk of headland damage whilst turning. Its compact transportation design allows for safe and easy relocation between fields whilst its variable cutting width allows you to change mow widths when needed.

Backed by Trimax's industry leading 3 year warranty, the X-WAM S5 ZR is the ultimate solution for wide area turf management.

TALK TO US TODAY ABOUT THE CAPABILITIES  
OF X-WAM SERIES 5 ZR IN YOUR ENVIRONMENT.

SPECIFICATIONS	1150
Cutting Width	11.5m (37' 7")
Overall Width	11.65m (38' 3")
Overall Length	7.36m (24' 1")
Transport Width	2.96m (9' 8 1/2")
Transport Height	4.1m (13' 5")
Cut Height Range	20 - 180mm (3/4" - 7 1/2")
No. of Blade Spindles	23
Approx. Weight	5,470kg (12,060lbs)
Min PTO Output	90 hp

\*Minimum PTO output is a guide only.  
Requirement varies with the type of work and the terrain



Trimax X-WAM is great equipment. It replaced one tractor, one employee and reduced mowing time. Less equipment to maintain and less equipment expense has increased our profitability.

- LYNN GIBB | Hope Plantation Turf, Texas USA

KEY  
APPLICATIONS.

✓ Turf / Sod Farms ✓ Passive Turf & Open Space

WHAT'S NEW?

The new X-Wam is 1.2m larger than the previous model. The deck design has been brought in line with the Pegasus S5, providing a range of maintenance and quality improvements. The inclusion of front and rear castors make it perfect for use on delicate grass species, maintenance mowing and open space long grass applications. With QuikLift now standard, it is the most maneuverable wide area mower in its class.

★★★  
INDUSTRY LEADING  
WARRANTY

3  
YEAR

INCLUDES SPINDLES  
& GEARBOXES  
EXPERIENCED SERVICE  
& SUPPORT NETWORK

PRODUCT  
FEATURES.




FRONT & REAR CASTORS

Mowing decks travel on front and rear castors, allowing long grass to be cut without being rolled first. Castors are offset to minimise compaction.



ZERO DAILY MAINTENANCE

Spindles, castor wheels and auto-belt tensioning system are maintenance-free.



VARIABLE CUTTING WIDTH

With a variable cutting width between 7.2m and 11.5m you can adjust your mow widths quickly when required.



FULLY INTEGRATED CHASSIS

The X-WAM has a purpose built fully integrated chassis which has increased durability by 50% compared to the previous model.

\*OPTIONAL  
FEATURES.

✓ GALVANIZED SURFACE COATING  
Protects against corrosion in harsh conditions.

✓ QUATTRO BLADES  
Four blades (flat, upturned or mixed) per spindle for a finer cut.

✓ NEXABLADES  
Scientifically designed for high-end turf giving a superior cut and spread when it matters most.

✓ ON-CALL KIT  
Each kit contains blades and belts for a quick replacement in the field.



QUIKLIFT

Enables mower decks to be raised without disengaging the PTO to reduce turf damage when turning.



OPTIMAL HEIGHT OF CUT RANGE

The front and rear castors enable a height of cut range of 20mm - 180mm, making it suitable for use across a variety of grass lengths.



ULTIMATE CONTOUR FOLLOWING

The X-Wam S5 features multiple small decks for superior cut quality in undulating conditions.



EASE OF USE

Stand-on covers, hydraulic parking jack, and electric unlock simplify operation.



WHEELS RUN ON CUT GRASS

The rear deck is located between the transport wheels, so the grass is not flattened prior to mowing.



TURF TYRE

The chassis tyres are 15% wider than the previous model distributing weight evenly across the turf.

VIEW MORE PHOTOS, VIDEOS, AND INFORMATION  
ABOUT THE TRIMAX X-WAM ONLINE HERE:





# TRIMAX FLAILDEK FX



**TRIMAX FLAIL  
TECHNOLOGY  
FOR OUT FRONT  
OPERATION.**

## TRIMAX FLAILDEK FX

The Trimax FlailDek FX offers a high-performance alternative to standard factory-fitted rotary mowing attachments.

FlailDek FX has the ability to deliver an exceptionally clean cut and disperse clippings safely and is used by contractors, councils, schools and land owners around the world. A highly versatile mower, FlailDek FX is also able to mulch branches up to 25mm in diameter, mow high grass and using the unique converter flap is suitable for sports fields and other fine turf applications.

The FlailDek FX has been designed to have minimal maintenance requirements and a low total cost of ownership yet deliver maximum reliability.

**TALK TO US TODAY ABOUT THE  
CAPABILITIES OF FLAILDEK FX  
IN YOUR ENVIRONMENT.**

	135	155	185
<b>Cutting Width</b>	1.36m (4' 6")	1.52m (5')	1.83m (6')
<b>Overall Width</b>	1.56m (5' 1½")	1.72m (5' 8")	2.05m (6' 8½")
<b>Overall Length</b>	1.1m (3' 7")	1.1m (3' 7")	1.1m (3' 7")
<b>Overall Height</b>	0.37m (1' 2½")	0.37m (1' 2½")	0.37m (1' 2½")
<b>Cut Height Range</b>	20 - 100mm (¾" - 4")	20 - 100mm (¾" - 4")	20 - 100mm (¾" - 4")
<b>Approx. Weight</b>	210kg (460lbs)	225kg (495lbs)	250kg (550lbs)
<b>Total Belts</b>	2	2	2
<b>No. of Flails</b>	28	32	40
<b>Min PTO Output</b>	N/A	N/A	N/A

\*Minimum PTO output is a guide only. Requirement varies with the type of work and the terrain



*This year I could not have coped without anything other than a Trimax FlailDek, it's versatile, cuts rough and fine grass even in the wet conditions and copes with it easily.*

- ANDREW HALL | Truelink Ltd

### KEY APPLICATIONS.

- ✓ Municipal & Contractors
- ✓ School & Sports Fields
- ✓ Golf & Country Clubs (Roughs)
- ✓ Lifestyle & Estates
- ✓ Racecourses
- ✓ Horticulture

### WHAT'S NEW ON FLAILDEK FX

Strength and durability are increased from the original FlailDek design with the incorporation of a high tensile steel body, a 70% stronger rotor, a stronger gearbox, and forged steel Trimax Gamma Flails. The unique converter has also been added.

\*\*\*  
**INDUSTRY LEADING  
WARRANTY**

**3  
YEAR**

INCLUDES SPINDLES  
& GEARBOXES  
EXPERIENCED SERVICE  
& SUPPORT NETWORK



### PRODUCT FEATURES.



#### REAR ROLLER

Full width rear roller prevents scalping, permits the edge of the mower to be run along kerbs, adds to overall safety and produces striping.



#### POWER SAVING FLAILS

Strong forged steel flail with an aerodynamic profile reduces hp requirements yet generates sufficient draught to lift grass for a clean cut.



#### NEW IMPROVED ROTOR

Dynamically balanced and designed for durability to withstand everyday use in the toughest mowing environments.



#### SAFE CLIPPING DISPERSION

Safety is paramount when mowing in public areas. This is why Trimax has designed the FlailDek FX to expel debris in a downward direction behind the mower.



#### FRONT CASTOR WHEELS

Front castor wheels allow the FlailDek FX to follow ground contours independently from the tractor. The semi-pneumatic tires are impossible to puncture.



#### WEAR RESISTANT SKIDS

Wear resistant trailing skids made from abrasion-resistant steel extends bearing life and enables high productivity in the most challenging environments.

**VIEW MORE PHOTOS, VIDEOS, AND INFORMATION  
ABOUT THE TRIMAX FLAILDEK FX ONLINE HERE:**





# TRIMAX EZEEMOW/FX



TRIMAX FLAIL  
TECHNOLOGY FOR  
COMPACT TRACTORS.

## TRIMAX EZEEMOW/FX

The EZEEMOW FX is the ideal partner for your compact tractor where versatility and robustness is needed.

With its compact dimension, Ezeemow FX can fit closely to the tractor and manoeuvre into tight corners. Able to mow anything from fine turf to small prunings, vegetation up to 25mm in diameter and high grass, the Ezeemow FX can transform areas into tidy mown lawn in a single pass. This versatility makes the Ezeemow FX ideal for contractors, councils, roadsides, estates, and orchard applications.

The Ezeemow FX has been designed to have minimal maintenance requirements and low total cost of ownership yet deliver maximum reliability.

TALK TO US TODAY ABOUT THE  
CAPABILITIES OF EZEEMOW FX  
IN YOUR ENVIRONMENT.

	135	155	185
			
<b>SPECIFICATIONS</b>			
<b>Cutting Width</b>	1.36m (4' 6")	1.52m (5')	1.83m (6')
<b>Overall Width</b>	1.56m (5' 1½")	1.72m (5' 8")	2.05m (6' 8½")
<b>Overall Length</b>	0.58m (1' 11")	0.58m (1' 11")	0.58m (1' 11")
<b>Overall Height</b>	0.37m (1' 2½")	0.37m (1' 2½")	0.37m (1' 2½")
<b>Cut Height Range</b>	10 - 100mm (¾" - 4")	10 - 100mm (¾" - 4")	10 - 100mm (¾" - 4")
<b>Approx. Weight</b>	180kg (396lbs)	200kg (440lbs)	225kg (495lbs)
<b>Total Belts</b>	2	2	2
<b>No. of Flails</b>	28	32	40
<b>Min PTO Output</b>	17hp	20hp	24hp

\*Minimum PTO output is a guide only. Requirement varies with the type of work and the terrain



I've been mowing 30hrs a week for over 28 years and my Ezeemow still has the same gearbox. It produces a beautiful cut and if I had to, I'd replace it with the exact same model...no two ways about it!  
- STEVE DE BRUIN | Grass Cutting Services, Tauranga NZ

### KEY APPLICATIONS.

✓ Municipal & Contractors   ✓ Horticulture   ✓ Lifestyle & Estates

### WHAT'S NEW ON EZEEMOW/FX

Strength and durability are increased from the original Ezeemow design with the incorporation of a high tensile steel body, a 70% stronger rotor, a stronger gearbox, and forged steel Trimax Gamma Flails. The unique converter, an improved belt tensioning system, and easy height adjustment on the full width roller have also been added.

### PRODUCT FEATURES.



#### SAFE CLIPPING DISPERSION

Safety is paramount when mowing in public areas. This is why Trimax has designed the Ezeemow FX to expel debris in a downward direction behind the mower.



#### POWER SAVING FLAILS

Strong forged steel flail with an aerodynamic profile reduces hp requirements yet generates sufficient draught to lift grass for a clean cut.



#### \*RIGHT-HAND OFFSET

Comes standard with a centre mount but is available in a right-hand offset to suit your specific mowing requirements.



#### REAR ROLLER

Full width rear roller prevents scalping, permits the edge of the mower to be run along kerbs, adds to overall safety and produces striping.






#### NEW IMPROVED ROTOR

Dynamically balanced and designed for durability to withstand everyday use in the toughest mowing environments.

### EZEEMOW OFFSET DIAGRAM

ONLY AVAILABLE IN FIXED  
CENTRE MOUNT OR  
OFFSET POSITIONS

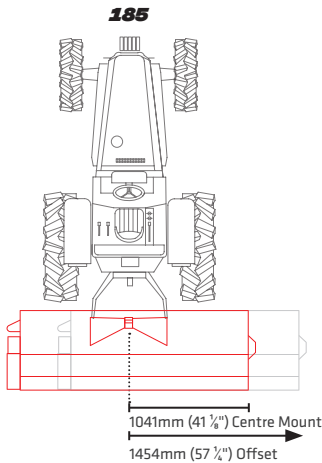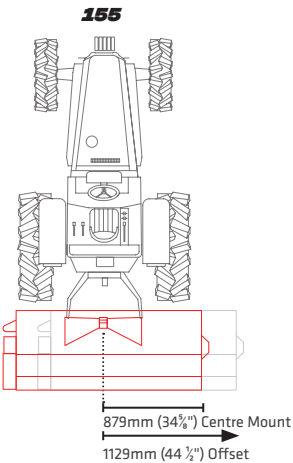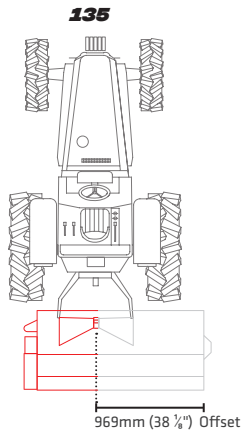

\*\*\*  
**INDUSTRY LEADING  
WARRANTY**

**3  
YEAR**

INCLUDES SPINDLES  
& GEARBOXES  
EXPERIENCED SERVICE  
& SUPPORT NETWORK

### \*OPTIONAL FEATURES.

#### ✓ UNIQUE CONVERTER

Change the position of the converter flap to suit your application. Go from mowing to mulching in seconds.

VIEW MORE PHOTOS, VIDEOS, AND INFORMATION  
ABOUT THE TRIMAX EZEEMOW FX ONLINE HERE:







# TRIMAX FORCE

## TRIMAX FORCE

The Trimax Force is the multitool mower and mulcher you need to get the job done, no matter what that job might be. Turn long grass and large prunings into an expertly cut and finely mulched field in a single pass.

As Trimax's strongest and most adaptable flail mower yet, with a wide range of options available for custom configuration, the Force can easily be tailored to produce a pristine cut and superior finish in almost any application. For reliable productivity and excellent results, the Trimax Force is the ultimate choice.

**TALK TO US TODAY ABOUT THE CAPABILITIES OF THE TRIMAX FORCE IN YOUR ENVIRONMENT.**

**A HIGH-UTILITY  
HEAVY-DUTY  
POWERHOUSE.**



SPECS	115	145	175	205	235
Cutting Width	1.15m (3' 9 1/4")	1.44m (4' 8 3/4")	1.73m (5' 8 1/8")	2.02m (6' 7 3/8")	2.3m (7' 6 3/8")
Overall Width	1.45m (4' 8 7/8")	1.73m (5' 8 1/8")	2.02m (6' 7 3/8")	2.31m (7' 7")	2.59m (8' 5 7/8")
Overall Length	1.15m (3' 9 1/4")	1.15m (3' 9 1/4")	1.15m (3' 9 1/4")	1.15m (3' 9 1/4")	1.15m (3' 9 1/4")
Overall Height	0.5m (1' 7 3/4")	0.5m (1' 7 3/4")	0.5m (1' 7 3/4")	0.5m (1' 7 3/4")	0.5m (1' 7 3/4")
Cut Height Range	0 - 60mm (0 - 2 3/8")	0 - 60mm (0 - 2 3/8")	0 - 60mm (0 - 2 3/8")	0 - 60mm (0 - 2 3/8")	0 - 60mm (0 - 2 3/8")
Approx. Weight	590kg (1300lbs)	650kg (1435lbs)	755kg (1665lbs)	815kg (1795lbs)	870kg (1920lbs)
Flails	16	20	24	28	32
Min PTO Output	30hp	35hp	40hp	45hp	50hp

\*Minimum PTO Output is a guide only. Requirement varies with the type of work and the terrain.

### KEY APPLICATIONS.

✓ Municipal & Contractors ✓ Horticulture ✓ Aviation ✓ Racecourses ✓ Lifestyle & Estates

### WHAT'S NEW ON FORCE.


Strength and durability have been increased, including 50% thicker endplates and a newly designed rotor bearing assembly with over 35% higher load capacity than Trimax's previous flail mowers. Zero-maintenance features and a wider array of options have also been introduced.




### PRODUCT FEATURES.



**MOW AND MULCH WITH ONE MACHINE**  
Mow grass to a fine finish and mulch prunings up to 90mm in diameter with one machine.



**REPLACEABLE INTERNAL LINER**  
A 6mm replaceable internal liner reduces noise and increases durability in the mower's high-impact zones.




**LOW MAINTENANCE**  
Easily accessible grease locations and maintenance-free features make regular service quicker and easier than ever.



**DISCHARGE CONTROL**  
The coarseness of mulch can be controlled by adjusting the height of the rear flap.



**OFFSET CAPABILITIES**  
The Force can come with a left- or right-hand offset with an additional 500mm of hydraulic side shift. Available on the 175, 205, and 235 models.




**MAINTENANCE-FREE ROLLER BEARINGS**  
New highly-rated sealed roller bearing stacks require no regular greasing.



**AUTO BELT TENSIONING**  
The belt system is equipped with automatic tensioners to optimize drive to the rotor without requiring manual adjustments.



**SMOOTH EXTERNAL PROFILE**  
New internal rotor bearings create a smooth external profile and provide a closer cut around obstacles.



**HEAVY-DUTY SKIDS**  
Heavy-duty wear skids on the mower trailing arms prolong mower life in demanding terrain and are easily removed or replaced.

### \*OPTIONAL FEATURES.

- ✓ **HEAVY DUTY LINER**  
Increases durability in the mower's high impact zone.
- ✓ **HEAVY DUTY ROLLER**  
Increases roller wall thickness from 5mm to 11mm.
- ✓ **ROLLER SCRAPERS**  
Cleans rollers and reduces clumping in wet conditions.
- ✓ **MULCHING COUNTERBLADES**  
Produces an ultra-fine mulch.
- ✓ **PRUNING RAKES**  
Collects prunings into the cutting chamber.
- ✓ **LIGHTING KIT WITH STORAGE BRACKET**  
LED road lights, safety triangle, and bracket for storage box.
- ✓ **STORAGE BOX**  
Easy access to spare parts and tools.
- ✓ **SAFETY DISPERSION GUARD**  
Recommended for all mowers operating in public spaces, the Safety Dispersion Guard ensures that debris exits the cutting chamber safely.
- ✓ **FRONT MOUNT**  
Available in front mount three-point linkage configuration for increased visibility.

**VIEW MORE PHOTOS, VIDEOS, AND INFORMATION ABOUT THE TRIMAX FORCE ONLINE HERE:**





# TRIMAX WARLORD S3

YOUR ALL-PURPOSE  
WORKING COMPANION.



## TRIMAX WARLORD S3

Extremely versatile, the Trimax WARLORD S3 is bound to dominate any environment you put it in – handling long and short grass, prunings up to 75mm in diameter, turf ribbons and offcuts with ease.


Tame rough patches full of scrub and branches in one pass and leave behind a field of evenly distributed mulch and clippings. Control the coarseness of discharge with Warlord's adjustable rear flap while safely dispersing clippings. The Trimax Warlord is tough and durable, requiring minimal maintenance and simplifying repairs to keep your machine running for years. Spend less time and money keeping your mower operating at 100%.

The Trimax Warlord S3 is a medium duty mower/mulcher suitable for a wide range of applications including sod and turf farming, horticulture, passive turf management, contracting/hire, and land reclamation.

**TALK TO US TODAY ABOUT THE  
CAPABILITIES OF WARLORD SERIES 3  
IN YOUR ENVIRONMENT.**

SPECIFICATIONS	175	205	235
Cutting Width	1.74m (5' 9")	2.04m (6' 8")	2.34m (7' 8")
Overall Width	2.04m (6' 8")	2.34m (7' 8")	2.66m (8' 8")
Overall Length	1.05m (3' 5")	1.05m (3' 5")	1.05m (3' 5")
Overall Height	0.55m (1' 10")	0.55m (1' 10")	0.55m (1' 10")
Cut Height Range	0 - 70mm (0 - 2¾")	0 - 70mm (0 - 2¾")	0 - 70mm (0 - 2¾")
Approx. Weight	690kg (1520lbs)	750kg (1650lbs)	810kg (1780lbs)
No. of Flails	24	28	32
Min PTO Output	40hp	44hp	49hp

\*Minimum PTO output is a guide only. Requirement varies with the type of work and the terrain



*We do a lot of roadside work for councils, shires and local government. We use the Warlord where it's too tough for other machines, from my past experience it stands head and shoulders above the rest.*

**- ALAN CHAPEL** | AML Turf, Wodonga QLD

### KEY APPLICATIONS.

✓ Horticulture ✓ Municipal & Contractors ✓ Turf ✓ Aviation ✓ Racecourses

### WHAT'S NEW ON WARLORD S3

The hydraulic side shift and discharge control capabilities are new from the previous Warlord series, further increasing the versatility of the machine.


\*\*\*  
**INDUSTRY LEADING  
WARRANTY**  
**3**  
YEAR  
INCLUDES SPINDLES  
& GEARBOXES  
EXPERIENCED SERVICE  
& SUPPORT NETWORK

### PRODUCT FEATURES.




#### HYDRAULIC SIDE SHIFT

The Warlord can be quickly offset to the right by up to 500mm. Perfect for transport and manoeuvring around obstacles whilst mowing.



#### DISCHARGE CONTROL

Fine mulch is produced with the flap in the lowest position. Controlling discharge assists with safety in public spaces. Lift flap open for easy flail servicing.



#### PRUNING GUIDE

Helps direct prunings in and under the mower. Also helps keep debris away from the hydraulic system.



#### REPLACEABLE INTERNAL LINER

A bolt-in 6mm replaceable internal liner increases the life of the body, minimises damage and reduces noise.



#### REPLACEABLE SKIDS

Skids on Warlord trailing arms prolong mower life in demanding terrain and can be replaced when required.



#### RIGHT HAND OFFSET

Warlord is configured with right-hand offset for increased over-the-shoulder visibility.




### \*OPTIONAL FEATURES.

#### ✓ ROLLER SCRAPERS

Cleans rollers and reduces clumping in wet conditions.

### WARLORD OFFSET DIAGRAM

HYDRAULIC SIDE SHIFT /  
RIGHT-HAND SIDE SHIFT  
ONLY

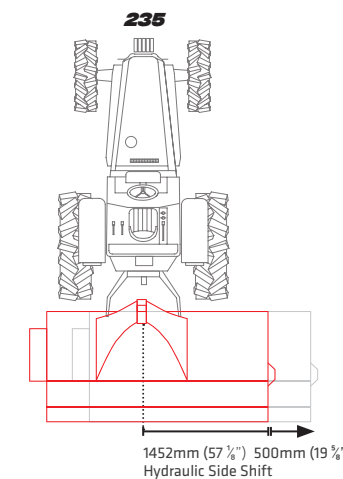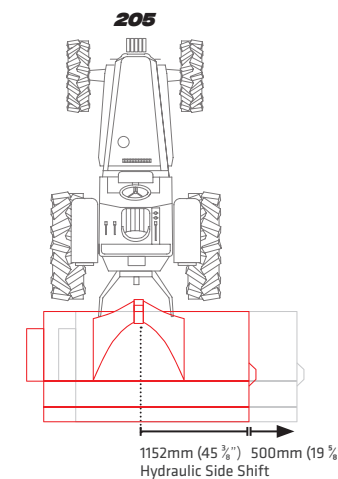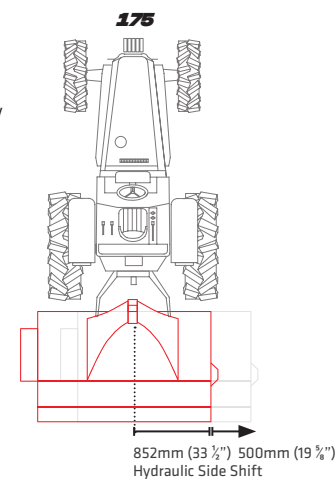

**VIEW MORE PHOTOS, VIDEOS, AND INFORMATION  
ABOUT THE TRIMAX WARLORD SERIES 3 ONLINE HERE:**





WANT TO KNOW MORE?  
**FIND US  
ONLINE.**

## THE TRIMAX WEBSITE.

The Trimax website contains more information, photos, and videos of our products and features.

**TRIMAXMOWERS.CO.NZ**



OR USE THIS  
QR CODE

## THE TRIMAX RESOURCE CENTRE.

Easily accessed from the main website, the Trimax Resource Centre provides everything you need to easily service and maintain your Trimax mower. Best of all, it's completely free.

### THE TRIMAX RESOURCE CENTRE CONTAINS:





#### THE TRIMAX CUSTOMER CENTRE.

- ✓ Watch step-by-step service and setup videos.
- ✓ Download maintenance checklists.
- ✓ Access the operator manual and parts manual for your mower.
- ✓ Read instructions for installing Trimax Genuine Spare Parts.
- ✓ Register warranty or file a claim.



#### THE TRIMAX PARTS SHOP.

- ✓ Order Trimax Genuine Parts and Service Kits
- ✓ Review past orders.
- ✓ Upload bulk orders for quick and easy fleet maintenance.
- ✓ Quickly find common parts.
- ✓ Now with improved search functionality – find exactly the part you need.

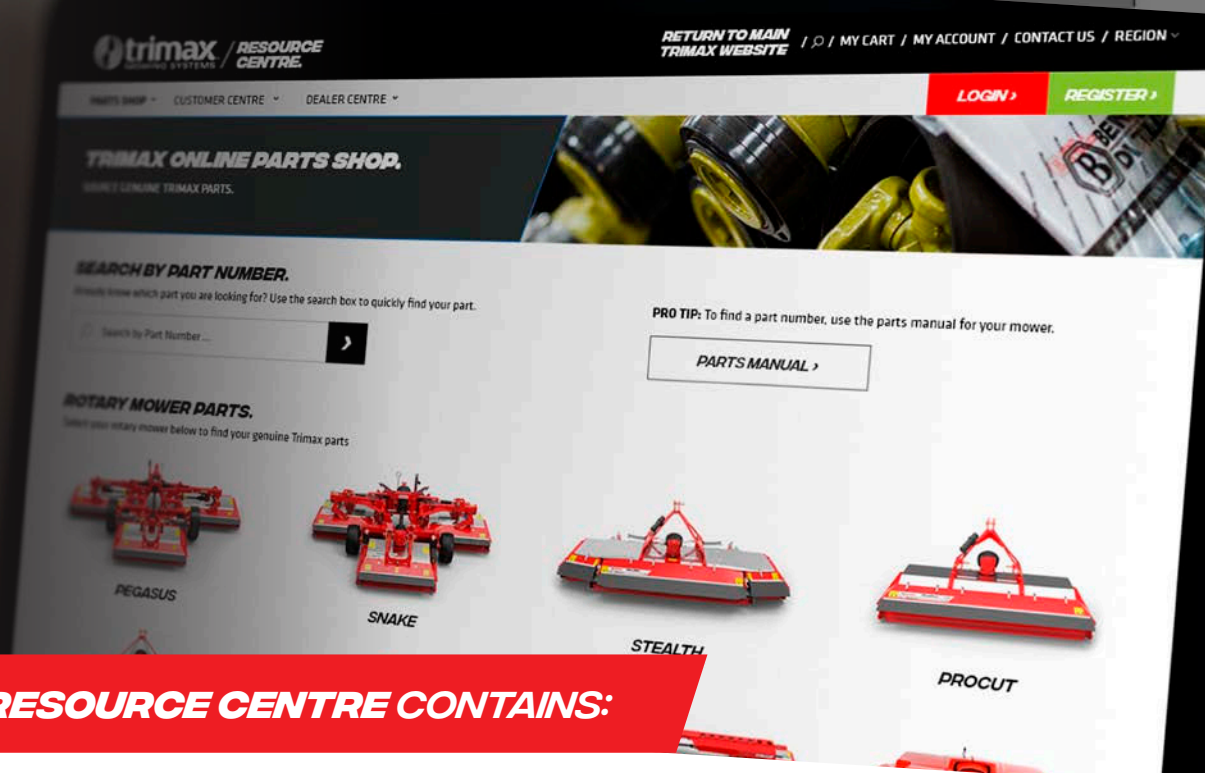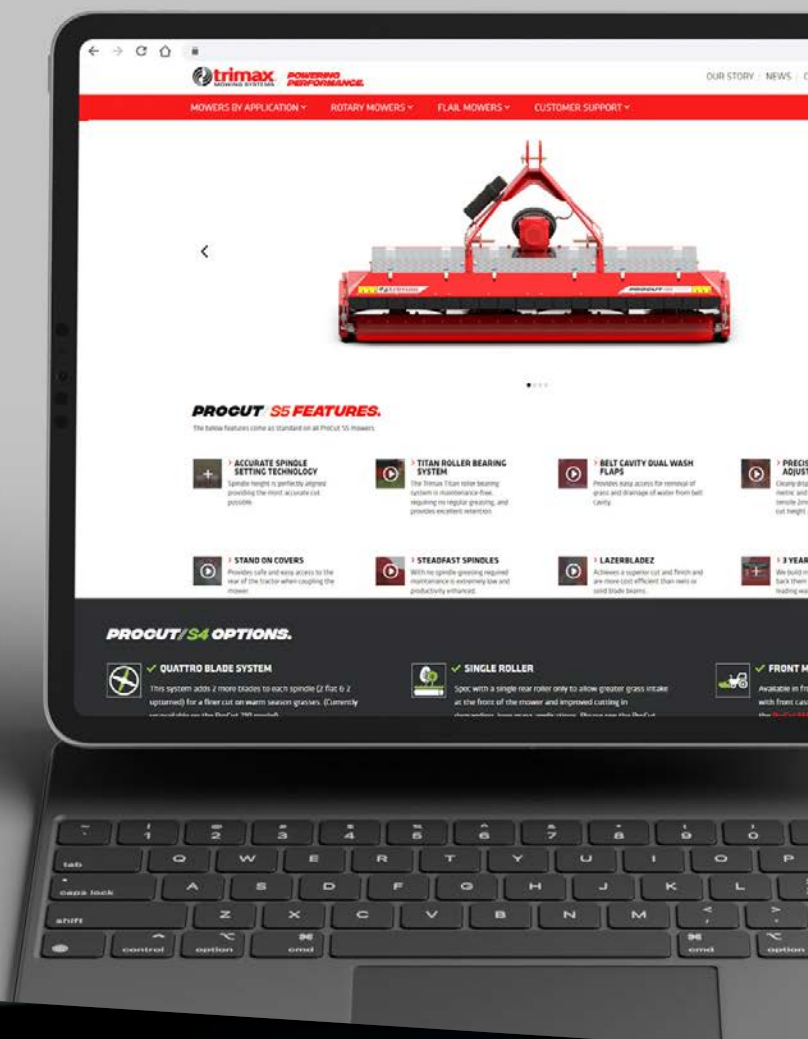

## PASSIONATE ABOUT POWERING YOUR PERFORMANCE.



WHEN DOWNTIME IS NOT  
AN OPTION, SAVE MONEY  
ON EQUIPMENT THAT  
LASTS. YOU CAN COUNT  
ON TRIMAX.



#### LOW TOTAL COST OF OWNERSHIP.

- Long commercial life, with mowers 35 years old and counting still in the field.
- Reduced time, labour, and fuel requirements for each job.
- Affordable aftermarket parts guaranteed to meet Trimax quality standards.



#### RELIABLE SUPPORT.

- Next-day parts dispatch from our local warehouse in Tauranga.
- Knowledgeable local service staff and easy-to-access online resources.
- Industry-leading 3-year warranty which includes spindles and gearboxes.



#### PRODUCTIVITY-BOOSTING EFFICIENCY.

- Less time in the shop with minimised and simplified service requirements.
- Designed for/tested in the harshest environments for maximum uptime in normal commercial operations.
- A wide range of available options to customise for your specific needs.

## INDUSTRY-LEADING 3-YEAR WARRANTY.



TRIMAX BUILDS MOWERS  
THAT LAST, AND WE BACK  
THAT UP BY OFFERING  
THE LONGEST AND  
MOST COMPREHENSIVE  
WARRANTY IN THE  
INDUSTRY.

All Trimax mowers come with a standard 12-month warranty with the opportunity to extend **another 24 months** by registering new machines online.

- ✓ **COVERS SPINDLES**
- ✓ **COVERS GEARBOXES**
- ✓ **ABSOLUTELY FREE**





**DESIGNED &  
MANUFACTURED IN**



#### **TRIMAX MOWING SYSTEMS**

70 Maleme Street, Tauranga 3140

**P** 07 541 0411 / **E** [info@trimaxmowers.co.nz](mailto:info@trimaxmowers.co.nz)

---

#### **FOR MOWER SALES**

**P** 07 543 1892 / **E** [info@trimaxmowers.co.nz](mailto:info@trimaxmowers.co.nz)

---

#### **FOR PARTS ORDERS**

**P** 07 543 1897 / **E** [parts@trimaxmowers.co.nz](mailto:parts@trimaxmowers.co.nz)



**f X i y in v // TRIMAXMOWERS.CO.NZ**